NASA PATENT ABSTRACTS BIBLIOGRAPHY

A CONTINUING BIBLIOGRAPHY



The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the lead center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- TECHNICAL PUBLICATION. Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- TECHNICAL MEMORANDUM. Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- CONTRACTOR REPORT. Scientific and technical findings by NASA-sponsored contractors and grantees.

- CONFERENCE PUBLICATION. Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- SPECIAL PUBLICATION. Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- TECHNICAL TRANSLATION.
 English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at http://www.sti.nasa.gov
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA STI Help Desk at (301) 621-0134
- Telephone the NASA STI Help Desk at (301) 621-0390
- Write to: NASA STI Help Desk NASA Center for AeroSpace Information 7121 Standard Drive Hanover, MD 21076

Introduction

Several thousand inventions result each year from the aeronautical and space research supported by the National Aeronautics and Space Administration. The inventions having important use in government programs or significant commercial potential are usually patented by NASA. These inventions cover practically all fields of technology and include many that have useful and valuable commercial application.

NASA inventions best serve the interests of the United States when their benefits are available to the public. In many instances, the granting of nonexclusive or exclusive licenses for the practice of these inventions may assist in the accomplishment of this objective. This bibliography is published as a service to companies, firms, and individuals seeking new, licensable products for the commercial market.

The NASA Patent Abstracts Bibliography is a semiannual NASA publication containing comprehensive abstracts of NASA owned inventions covered by U.S. patents. The citations included in the bibliography arrangement of citations were originally published in NASA's Scientific and Technical Aerospace Reports (STAR) and cover STAR announcements made since May 1969.

The citations published in this issue cover the period July 2001 through December 2001. This issue includes 10 major subject divisions separated into 76 specific categories and one general category/division. (See Table of Contents for the scope note of each category, under which are grouped appropriate NASA inventions.) This scheme was devised in 1975 and revised in 1987 in lieu of the 34 category divisions which were utilized in supplements (01) through (06) covering *STAR* abstracts from May 1969 through January 1974. Each entry consists of a *STAR* citation accompanied by an abstract and, when appropriate, a key illustration taken from the patent or application for patent. Entries are arranged by subject category in ascending order.

A typical citation and abstract presents the various data elements included in most records cited. This appears after the table of contents.

Information About Patent Availability and Licenses

Patent Availability

How to obtain copies of NASA patents.

Licenses for Commercial Use

Information on obtaining a license to use a NASA patented invention.

Address of NASA Patent Counsels

Addresses for the NASA center patent counsels having knowledge of the invention.

Patent Licensing Regulations

Information about the policies and procedures for licensing federally owned inventions in the custody of the National Aeronautics and Space Administration.

SCAN Goes Electronic!

If you have electronic mail or if you can access the Internet, you can view biweekly issues of *SCAN* from your desktop absolutely free!

Electronic SCAN takes advantage of computer technology to inform you of the latest worldwide, aerospace-related, scientific and technical information that has been published.

No more waiting while the paper copy is printed and mailed to you. You can view *Electronic SCAN* the same day it is released—up to 191 topics to browse at your leisure. When you locate a publication of interest, you can print the announcement. You can also go back to the *Electronic SCAN* home page and follow the ordering instructions to quickly receive the full document.

Start your access to *Electronic SCAN* today. Over 1,000 announcements of new reports, books, conference proceedings, journal articles...and more—available to your computer every two weeks.

Timely Flexible Complete FREE!

For Internet access to *E-SCAN*, use any of the following addresses:

http://www.sti.nasa.gov ftp.sti.nasa.gov gopher.sti.nasa.gov

To receive a free subscription, send e-mail for complete information about the service first. Enter **scan@sti.nasa.gov** on the address line. Leave the subject and message areas blank and send. You will receive a reply in minutes.

Then simply determine the SCAN topics you wish to receive and send a second e-mail to listserve@sti.nasa.gov. Leave the subject line blank and enter a subscribe command in the message area formatted as follows:

Subscribe <desired list> <Your name>

For additional information, e-mail a message to **help@sti.nasa.gov**.

Phone: (301) 621-0390

Fax: (301) 621-0134

Write: NASA STI Help Desk

NASA Center for AeroSpace Information

7121 Standard Drive Hanover, MD 21076

Looking just for Aerospace Medicine and Biology reports?

Although hard copy distribution has been discontinued, you can still receive these vital announcements through your *E-SCAN* subscription. Just **subscribe SCAN-AEROMED** in the message area of your e-mail to **listserve@sti.nasa.gov**.



Table of Contents

Select a category to view the collection of records cited. N.A. means no abstracts in that category.

01 Aeronautics (General)

N.A.

For related information, see also Astronautics.

02 Aerodynamics

Includes aerodynamics of bodies, combinations, wings, rotors, and control surfaces; and internal flow in ducts and turbomachinery. For related information, see also *34 Fluid Mechanics and Heat Transfer*.

03 Air Transportation and Safety

N.A.

Includes passenger and cargo air transport operations; and aircraft accidents. For related information, see also 16 Space Transportation and 85 Urban Technology and Transportation.

04 Aircraft Communications and Navigation

Includes digital and voice communication with aircraft; air navigation systems (satellite and ground based); and air traffic control. For related information, see also 17 Space Communications, Spacecraft Communications, Command and Tracking and 32 Communications Radar.

05 Aircraft Design, Testing and Performance

N.A.

Includes aircraft simulation technology. For related information, see also 18 Spacecraft Design, Testing and Performance and 39 Structural Mechanics. For land transportation vehicles, see 85 Urban Technology and Transportation.

06 Aircraft Instrumentation

Str.

Includes cockpit and cabin display devices; and flight instruments. For related information, see also 19 Spacecraft Instrumentation and 35 Instrumentation and Photography.

07 Aircraft Propulsion and Power

3

Includes prime propulsion systems and systems components, e.g., gas turbine engines and compressors; and onboard auxiliary power plants for aircraft. For related information, see also 20 Spacecraft Propulsion and Power, 28 Propellants and Fuels, and 44 Energy Production and Conversion.

08 Aircraft Stability and Control

N.A.

Includes aircraft handling qualities; piloting; flight controls; and autopilots. For related information, see also 05 Aircraft Design, Testing and Performance.

09 Research and Support Facilities (Air)

N.A.

Includes airports, hangars and runways; aircraft repair and overhaul facilities; wind tunnels; shock tubes; and aircraft engine test stands. For related information, see also *14 Ground Support Systems and Facilities (Space)*.

12 Astronautics (General)

N.A.

For extraterrestrial exploration, see 91 Lunar and Planetary Exploration.

13 Astrodynamics

N.A.

Includes powered and free-flight trajectories; and orbital and launching dynamics.

14 Ground Support Systems and Facilities (Space)

N.A.

Includes launch complexes, research and production facilities; ground support equipment, e.g., mobile transporters; and simulators. For related information, see also 09 Research and Support Facilities (Air).

15 Launch Vehicles and Space Vehicles

5

Includes boosters; operating problems of launch/space vehicle systems; and reusable vehicles. For related information, see also 20 Spacecraft Propulsion and Power.

16 Space Transportation

N.A.

Includes passenger and cargo space transportation, e.g., shuttle operations; and space rescue techniques. For related information, see also 03 Air Transportation and Safety and 18 Spacecraft Design, Testing and Performance. For space suits, see 54 Man/System Technology and Life Support.

17 Space Communications, Spacecraft Communications, Command and Tracking 6

Includes telemetry; space communication networks; astronavigation and guidance; and radio blackout. For related information, see also *04 Aircraft Communications and Navigation* and *32 Communications and Radar*.

18 Spacecraft Design, Testing and Performance

N.A.

Includes satellites; space platforms; space stations; spacecraft systems and components such as thermal and environmental controls; and attitude controls. For life support systems, see 54 Man/System Technology and Life Support. For related information, see also 05 Aircraft Design, Testing and Performance, 39 Structural Mechanics, and 16 Space Transportation.

19 Spacecraft Instrumentation

For related information, see also 06 Aircraft Instrumentation and 35 Instrumentation and Photography.

20 Spacecraft Propulsion and Power

8

Includes main propulsion systems and components, e.g., rocket engines; and spacecraft auxiliary power sources. For related information, see also 07 Aircraft Propulsion and Power, 28 Propellants and Fuels, 44 Energy Production and Conversion, and 15 Launch Vehicles and Space Vehicles.

23 Chemistry and Materials (General)

N.A.

24 Composite Materials

9

Includes physical, chemical, and mechanical properties of laminates and other composite materials. For ceramic materials see *27 Nonmetallic Materials*.

25 Inorganic and Physical Chemistry

10

Includes chemical analysis, e.g., chromatography; combustion theory; electrochemistry; and photochemistry. For related information see also 77 *Thermodynamics and Statistical Physics*.

26 Metallic Materials

44

Includes physical, chemical, and mechanical properties of metals, e.g., corrosion; and metallurgy.

27 Nonmetallic Materials

12

Includes physical, chemical, and mechanical properties of plastics, elastomers, lubricants, polymers, textiles, adhesives, and ceramic materials. For composite materials see 24 Composite Materials.

28 Propellants and Fuels

13

Includes rocket propellants, igniters and oxidizers; their storage and handling procedures; and aircraft fuels. For related information see also 07 Aircraft Propulsion and Power, 20 Spacecraft Propulsion and Power, and 44 Energy Production and Conversion.

29 Materials Processing

N.A.

Includes space-based development of products and processes for commercial application. For biological materials see *55 Space Biology*.

31 Engineering (General)

N.A.

Includes vacuum technology; control engineering; display engineering; cryogenics; and fire prevention.

32 Communications and Radar

14

Includes radar; land and global communications; communications theory; and optical communications. For related information see also *04 Aircraft Communications and Navigation* and *17 Space Communications, Spacecraft Communications, Command and Tracking*. For search and rescue see 03 Air Transportation and Safety, and *16 Space Transportation*.

33 Electronics and Electrical Engineering

17

Includes test equipment and maintainability; components, e.g., tunnel diodes and transistors; microminiaturization; and integrated circuitry. For related information see also 60 Computer Operations and Hardware and 76 Solid-State Physics.

34 Fluid Mechanics and Heat Transfer

N.A.

Includes boundary layers; hydrodynamics; fluidics; mass transfer and ablation cooling. For related information see also 02 Aerodynamics and 77 Thermodynamics and Statistical Physics.

35 Instrumentation and Photography

25

Includes remote sensors; measuring instruments and gauges; detectors; cameras and photographic supplies; and holography. For aerial photography see 43 Earth Resources and Remote Sensing. For related information see also 06 Aircraft Instrumentation and 19 Spacecraft Instrumentation.

36 Lasers and Masers

29

Includes parametric amplifiers. For related information see also 76 Solid-State Physics.

37 Mechanical Engineering

29

Includes auxiliary systems (nonpower); machine elements and processes; and mechanical equipment.

38 Quality Assurance and Reliability

N.A.

Includes product sampling procedures and techniques; and quality control.

39 Structural Mechanics

N.A.

Includes structural element design and weight analysis; fatigue; and thermal stress. For applications see 05 Aircraft Design, Testing and Performance and 18 Spacecraft Design, Testing and Performance.

42 Geosciences (General)

N.A.

43 Earth Resources and Remote Sensing

36

Includes remote sensing of earth resources by aircraft and spacecraft; photogrammetry; and aerial photography. For instrumentation see *35 Instrumentation and Photography*.

44 Energy Production and Conversion

N.A.

Includes specific energy conversion systems, e.g., fuel cells; global sources of energy; geophysical conversion; and windpower. For related information see also 07 Aircraft Propulsion and Power, 20 Spacecraft Propulsion and Power, and 28 Propellants and Fuels.

45 **Environment Pollution** N.A. Includes atmospheric, noise, thermal, and water pollution. 46 N.A. Geophysics Includes aeronomy; upper and lower atmosphere studies; ionospheric and magnetospheric physics; and geomagnetism. For space radiation see 93 Space Radiation. 47 N.A. Meteorology and Climatology Includes weather forecasting and modification. 48 N.A. Oceanography Includes biological, dynamic, and physical oceanography; and marine resources. For related information see also 43 Earth Resources and Remote Sensing. 51 N.A. Life Sciences (General) 52 37 Aerospace Medicine Includes physiological factors; biological effects of radiation; and effects of weightlessness on man and animals. 53 Behavioral Sciences N.A. Includes psychological factors; individual and group behavior; crew training and evaluation; and psychiatric research. 54 Man/System Technology and Life Support N.A. Includes human engineering; biotechnology; and space suits and protective clothing. For related information see also 16 Space Transportation. 55 Space Biology N.A. Includes exobiology; planetary biology; and extraterrestrial life. 59 Mathematical and Computer Sciences (General) N.A. 60 **Computer Operations and Hardware** 37 Includes hardware for computer graphics, firmware, and data processing. For components see 33 Electronics and Electrical Engineering.

61 Computer Programming and Software N.A.

Includes computer programs, routines, algorithms, and specific applications, e.g., CAD/CAM.

62	Computer Systems	N.A.
	Includes computer networks and special application computer systems.	
63	Cybernetics	38
	Includes feedback and control theory, artificial intelligence, robotics and experience information see also 54 Man/System Technology and Life Support.	ert systems. For
64	Numerical Analysis	39
	Includes iteration, difference equations, and numerical approximation.	
65	Statistics and Probability	N.A.
	Includes data sampling and smoothing; Monte Carlo method; and stochastic processes.	
66	Systems Analysis	N.A.
	Includes mathematical modeling; network analysis; and operations research	1.
67	Theoretical Mathematics	N.A.
	Includes topology and number theory.	
70	Physics (General)	N.A.
	For precision time and time interval (PTTI) see 35 Instrumentation and Photography; for geophysics, astrophysics or solar physics see 46 Geophysics, 90 Astrophysics, or 92 Solar Physics.	
71	Acoustics	N.A.
	Includes sound generation, transmission, and attenuation. For noise pollution see 45 Environment Pollution.	
72	Atomic and Molecular Physics	N.A.
	Includes atomic structure, electron properties, and molecular spectra.	
73	Nuclear and High-Energy Physics	N.A.
	Includes elementary and nuclear particles; and reactor theory. For space respace Radiation.	adiation see 93
74	Optics	40
	Includes light phenomena and optical devices. For lasers see 36 Lasers and Masers.	
75	Plasma Physics	N.A.
	Includes magnetohydrodynamics and plasma fusion. For ionospheric plasm	nas see 46 Geo-

physics. For space plasmas see 90 Astrophysics.

76 Solid-State Physics

N.A.

Includes superconductivity. For related information see also 33 Electronics and Electrical Engineering and 36 Lasers and Masers.

77 Thermodynamics and Statistical Physics

N.A.

Includes quantum mechanics; theoretical physics; and Bose and Fermi statistics. For related information see also 25 *Inorganic and Physical Chemistry* and 34 *Fluid Mechanics and Heat Transfer*.

80 Social Sciences (General)

N.A.

Includes educational matters.

81 Administration and Management

N.A.

Includes management planning and research.

82 Documentation and Information Science

42

Includes information management; information storage and retrieval technology; technical writing; graphic arts; and micrography. For computer documentation see 61 Computer Programming and Software.

83 Economics and Cost Analysis

N.A.

Includes cost effectiveness studies.

84 Law, Political Science and Space Policy

N.A.

Includes NASA appropriation hearings; aviation law; space law and policy; international law; international cooperation; and patent policy.

85 Urban Technology and Transportation

N.A.

Includes applications of space technology to urban problems; technology transfer; technology assessment; and surface and mass transportation. For related information see 03 Air Transportation and Safety, 16 Space Transportation, and 44 Energy Production and Conversion.

88 Space Sciences (General)

N.A.

89 Astronomy

N.A.

Includes radio, gamma-ray, and infrared astronomy; and astrometry.

90 Astrophysics

N.A.

Includes cosmology; celestial mechanics; space plasmas; and interstellar and interplanetary gases and dust. For related information see also 75 Plasma Physics.

91 Lunar and Planetary Exploration

N.A.

Includes planetology; and manned and unmanned flights. For spacecraft design or space stations see 18 Spacecraft Design, Testing and Performance.

92 Solar Physics

N.A.

Includes solar activity, solar flares, solar radiation and sunspots. For related information see also *93 Space Radiation*.

93 Space Radiation

N.A.

Includes cosmic radiation; and inner and outer earth's radiation belts. For biological effects of radiation see 52 Aerospace Medicine. For theory see 73 Nuclear and High-Energy Physics.

99 General N.A.

Includes aeronautical, astronautical, and space science related histories, biographies, and pertinent reports too broad for categorization; histories or broad overviews of NASA programs.

Indexes

Two indexes are available. You may use the **Find** command under the **Tools** menu while viewing the PDF file for direct match searching on any text string. You may also view the indexes provided, for searching on *NASA Thesaurus* subject terms and author names.

Subject Term Index

ST-1

Author Index

PA-1

Selecting an index above will link you to that comprehensive listing.

The New NASA Video Catalog is Here

To order your copy,
call the NASA STI Help Desk at
(301) 621-0390,

fax to

(301) 621-0134,

e-mail to

help@sti.nasa.gov, or visit the NASA STI program home page at

http://www.sti.nasa.gov


(Select STI Program Bibliographic Announcements)

Explore the Universe!

Typical Report Citation and Abstract

- 19970011223 NASA Langley Research Center, Hampton, VA USA
- ② Serrated-Planform Lifting-Surfaces
- McGrath, Brian E., Inventor, NASA Langley Research Center, USA; Wood, Richard M., Inventor, NASA Langley Research
- Center, USA; Oct. 22, 1996; 38p; In English
- Patent Info.: Filed 22 Oct. 1996; NASA-Case-LAR-15295-1; US-Patent-Appl-SN-734820
- 6 Report No.(s): NAS 1.71:LAR-15295-1; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche
- A set of serrated-planform lifting surfaces is provided which produces unexpectedly high lift coefficients at moderate to high angles-of-attack. Each serration, or tooth, is designed to shed a vortex. The interaction of the vortices greatly enhances the lifting capability over an extremely large operating range. Variations of the invention use serrated-planform lifting surfaces in planes different than that of a primary lifting surface. In an alternate embodiment, the individual teeth are controllably retractable and deployable to provide for active control of the vortex system and hence lift coefficient. Differential lift on multiple serrated-planform lifting surfaces provides an means for vehicle control. The important aerodynamic advantages of the serrated-planform lifting surfaces are not limited to aircraft applications but can be used to establish desirable performance characteristics for missiles, land vehicles, and/or watercraft.
- NASA
- **9** Angle of Attack; Lift; Vortex Shedding; Active Control; Lifting Bodies

0

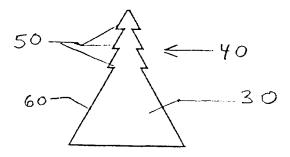

Key

- 1. Document ID Number; Corporate Source
- 2. Title
- 3. Author(s) and Affiliation(s)
- 4. Publication Date
- 5. Patent Information
- 6. Report Number(s); Availability and Price Codes
- 7. Abstract
- 8. Abstract Author
- 9. Subject Terms
- 10. Patent Illustration

NASA PATENT ABSTRACTS BIBLIOGRAPHY A Continuin

A Continuing Bibliography (Suppl. 60)

JANUARY 2002

02 AERODYNAMICS

Includes aerodynamics of bodies, combinations, wings, rotors, and control surfaces; and internal flow in ducts and turbomachinery. For related information see also 34 Fluid Mechanics and Heat Transfer.

20010110771 NASA Langley Research Center, Hampton, VA USA


Base Passive Porosity for Drag Reduction

Bauer, Steve X. S., Inventor, NASA Langley Research Center, USA; Wood, Richard M., Inventor, NASA Langley Research Center, USA; Sep. 11, 2001; 8p; In English; Continuation-in-part of abandoned US-Patent-Appl-SN-327061, filed 19 Oct. 1994 Patent Info.: Filed 1 Nov. 1996; NASA-Case-LAR-15601-1; US-Patent-6,286,892; US-Patent-Appl-SN-744414; US-Patent-Appl-SN-327061; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

A device for controlling drag on a ground vehicle is presented. The device consists of a porous skin mounted on the trailing surface of the ground vehicle. The porous skin may be separated from the vehicle surface by a distance of at least the thickness of the porous skin. Alternately, the trailing surface of the ground vehicle may be porous. The device minimizes the strength of the separation in the base and wake regions of the ground vehicle, thus reducing drag.

Official Gazette of the U.S. Patent and Trademark Office

Drag Reduction; Porosity; Mechanical Devices; Base Flow

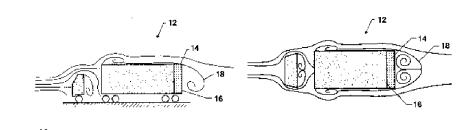

04 AIRCRAFT COMMUNICATIONS AND NAVIGATION

Includes digital and voice communication with aircraft; air navigation systems (satellite and ground based); and air traffic control. For related information see also 17 Space Communications, Spacecraft Communications, Command and Tracking and 32 Communications and Radar.

20010110772 NASA Goddard Space Flight Center, Greenbelt, MD USA


Global Positioning System Satellite Selection Method

Niles, Frederick A., Inventor, NASA Goddard Space Flight Center, USA; Aug. 21, 2001; 32p; In English; Provisional application of US-Patent-Appl-SN-092491, filed 8 Jul. 1998

Patent Info.: Filed 7 Jul. 1999; NASA-Case-GSC-13991-2; US-Patent-6,278,404; US-Patent-Appl-SN-348875; US- Patent-Appl-SN-092491; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

The satellite selection method as utilized by the spaceborne Global Positioning System receiver provides navigational solutions and is designed for use in low Earth orbit. The satellite selection method is a robust algorithm that can be used a GPS receiver to select appropriate GPS satellites for use in calculating point solutions or attitude solutions. The method is takes into account the difficulty of finding a particular GPS satellite phase code, especially when the search range in greatly increased due to Doppler shifts introduced into the carrier frequency. The method starts with an update of the antenna pointing and spacecraft vectors to determine the antenna backplane direction. Next, the GPS satellites that will potentially be in view of the antenna are ranked on a list, whereby the list is generated based on the estimated attitude and position of each GPS satellite. Satellites blocked by the Earth are not entered on this list. A second list is created, whereby the GPS satellites are ranked according to their desirability for use in attitude determination. GPS satellites are ranked according to their orthogonality to the antenna backplane, and according to geometric dilution of precision considerations. After the lists are created, the channels of the spaceborne GPS receiver are assigned to various GPS satellites for acquisition and lock. Preliminary Doppler frequencies for searching are assigned to the various channels.

Official Gazette of the U.S. Patent and Trademark Office Global Positioning System; Navigation Satellites; Receivers; Attitude (Inclination)

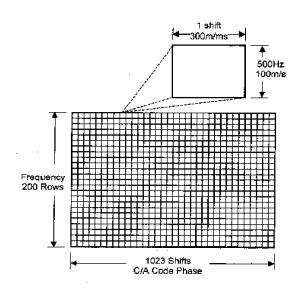

06 AVIONICS AND AIRCRAFT INSTRUMENTATION

20010095541 NASA Johnson Space Center, Houston, TX USA


Moving Object Control System

Arndt, G. Dickey, Inventor, NASA Johnson Space Center, USA; Carl, James R., Inventor, NASA Johnson Space Center, USA; Jun. 26, 2001; 16p; In English; Division of US-Patent-Appl-SN-944040, filed 29 Sep. 1997

Patent Info.: Filed 24 Mar. 2000; NASA-Case-MSC-22743-3; US-Patent-6,252,396; US-Patent-Appl-SN-535669; US-Patent-Appl-SN-944040; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A method is provided for controlling two objects relatively moveable with respect to each other. A plurality of receivers are provided for detecting a distinctive microwave signal from each of the objects and measuring the phase thereof with respect to a reference signal. The measured phase signal is used to determine a distance between each of the objects and each of the plurality of receivers. Control signals produced in response to the relative distances are used to control the position of the two objects. Official Gazette of the U.S. Patent and Trademark Office

Microwaves; Receivers; Control; Position (Location)

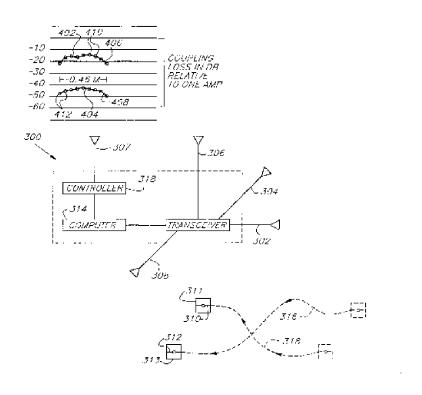

07 AIRCRAFT PROPULSION AND POWER

Includes prime propulsion systems and systems components, e.g., gas turbine engines and compressors; and onboard auxiliary power plants for aircraft. For related information see also 20 Spacecraft Propulsion and Power, 28 Propellants and Fuels, and 44 Energy Production and Conversion.

20010098603 NASA Glenn Research Center, Cleveland, OH USA

Reduced Toxicity Fuel Satellite Propulsion System

Schneider, Steven J., Inventor, NASA Glenn Research Center, USA; Aug. 14, 2001; 30p; In English


Patent Info.: Filed 14 Apr. 1999; NASA-Case-LEW-16636-1; US-Patent-6,272,846; US-Patent-Appl-SN-291883; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A reduced toxicity fuel satellite propulsion system including a reduced toxicity propellant supply for consumption in an axial class thruster and an ACS class thruster. The system includes suitable valves and conduits for supplying the reduced toxicity propellant to the ACS decomposing element of an ACS thruster. The ACS decomposing element is operative to decompose the reduced toxicity propellant into hot propulsive gases. In addition the system includes suitable valves and conduits for supplying the reduced toxicity propellant to an axial decomposing element of the axial thruster. The axial decomposing element is operative to decompose the reduced toxicity propellant into hot gases. The system further includes suitable valves and conduits for supplying

a second propellant to a combustion chamber of the axial thruster, whereby the hot gases and the second propellant auto-ignite and begin the combustion process for producing thrust.

Author

Toxicity; Spacecraft Propulsion; Decomposition; Propellant Combustion; Propellant Consumption; Fuel Systems; Rocket Oxidizers; Propulsion System Configurations

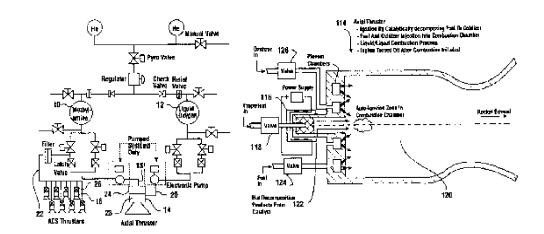

13 ASTRODYNAMICS

Includes powered and free-flight trajectories; and orbital and launching dynamics.

20010110769 NASA Goddard Space Flight Center, Greenbelt, MD USA

Method and Apparatus for Determining Position Using Global Positioning Satellites

Ward, John L., Inventor, NASA Goddard Space Flight Center, USA; Jan. 30, 2001; 12p; In English; Continuation-in-part of US-Patent-Appl-SN-627817, filed 1 Apr. 1996


Patent Info.: Filed 10 Aug. 1998; NASA-Case-GSC-13939-1; US-Patent-6,182,011; US-Patent-Appl-SN-131704; US-Patent-Appl-SN-627817; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A global positioning satellite receiver having an antenna for receiving a L1 signal from a satellite is presented. The L1 signal is processed by a preamplifier stage including a band pass filter and a low noise amplifier and output as a radio frequency (RF) signal. A mixer receives and de-spreads the RF signal in response to a pseudo-random noise code, i,e., Gold code, generated by an internal pseudo-random noise code generator. A microprocessor enters a code tracking loop, such that during the code tracking loop, it addresses the pseudorandom code generator to cause the pseudo-random code generator to sequentially output pseudo-random codes corresponding to satellite codes used to spread the L1 signal, until correlation occurs. When an output of the mixer is indicative of the occurrence of correlation between the RF signal and the generated pseudo-random codes, the microprocessor caters an operational state which slows the receiver code sequence to stay locked with the satellite cede sequence. The output of the mixer is provided to a detector which, in turn, controls certain routines of the microprocessor. The microprocessor will output pseudo range information according to an interrupt routine in response detection of correlation. The

pseudo range information is to be telemetered to a ground station which determines the position of the global positioning satellite receiver.

Official Gazette of the U.S. Patent and Trademark Office

Telemetry; Global Positioning System; Preamplifiers; Microprocessors

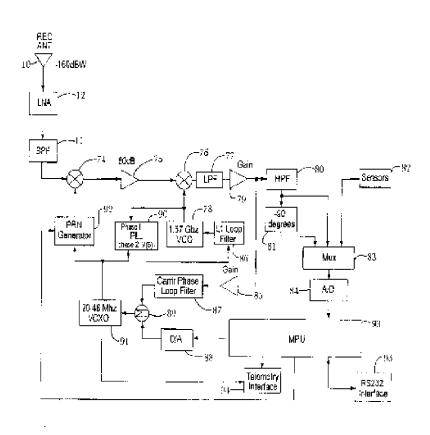

15
LAUNCH VEHICLES AND LAUNCH OPERATIONS

20010125604 NASA Marshall Space Flight Center, Huntsville, AL USA

Pressure-Driven Magnetically-Coupled Conveyance

Robertson, Glen A., Inventor, NASA Marshall Space Flight Center, USA; Jan. 09, 2001; 8p; In English


Patent Info.: Filed 18 Dec. 1998; NASA-Case-MFS-31184-1; US-Patent-6,170,404; US-Patent-Appl-SN-216492; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

This invention has the ability to provide the initial acceleration necessary for spacecraft to attain earth orbit without use of traditional rocket propellants. The invention also has the ability to provide an alternative means of ground transportation without the direct use of fossil fuel. The invention 6 utilizes a pressurized, nonmagnetic tube to accelerate and translate a piston. The piston

is magnetically coupled to a conveyance, which travels along the outside of the tube. The conveyance, in turn. can be either a spacecraft or a vehicle suitable for ground transportation.

Official Gazette of the U.S. Patent and Trademark Office

Fossil Fuels; Rocket Propellants; Surface Vehicles; Acceleration (Physics)

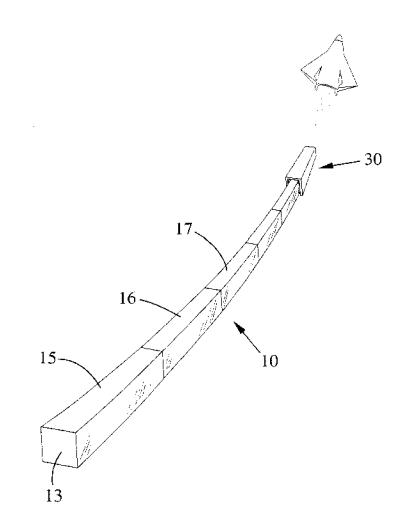

17
SPACE COMMUNICATIONS, SPACECRAFT COMMUNICATIONS, COMMAND AND TRACKING

Includes telemetry; space communications networks; astronavigation and guidance; and radio blackout. For related information see also 04 Aircraft Communications and Navigation and 32 Communications and Radar.

20010117890 NASA Goddard Space Flight Center, Greenbelt, MD USA

Spaceborne Global Positioning System for Spacecraft

Dougherty, Lamar F., Inventor, NASA Goddard Space Flight Center, USA; Niles, Frederick A., Inventor, NASA Goddard Space Flight Center, USA; Wennersten, Miriam D., Inventor, NASA Goddard Space Flight Center, USA; Apr. 03, 2001; 28p; In English; Provisional application of US-Patent-Appl-SN-092491, filed 8 Jul. 1998


Patent Info.: Filed 7 Jul. 1999; NASA-Case-GSC-13991-1; US-Patent-6,211,822; US-Patent-Appl-SN-348876; US-Patent-Appl-SN-092491; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

The spaceborne Global Positioning System receiver provides navigational solutions and is designed for use in low Earth orbit. The spaceborne GPS receiver can determine the orbital position of a spacecraft using any of the satellites wi thin the GPS constellation. It is a multiple processor system incorporating redundancy by using a microcontroller to handle the closure of

tracking loops for acquired GPS satellites, while a separate microprocessor computes the spacecraft navigational solution and handles other tasks within the receiver. 'Me spaceborne GPS receiver can use either microcontroller or the microprocessor to close the satellite tracking loops. The use of microcontroller provides better tracking performance of acquired GPS satellites. The spaceborne GPS receiver utilizes up to seven separate GPS boards, with each board including its own set of correlators, down-converters and front-end components. The spaceborne GPS receiver also includes telemetry and time-marking circuitry. The spaceborne GPS receiver communicates with other spacecraft systems through a variety of interfaces and can be software-configured to support several different mission profiles.

Official Gazette of the U.S. Patent and Trademark Office

Global Positioning System; Navigation Satellites; Satellite Tracking; Low Earth Orbits

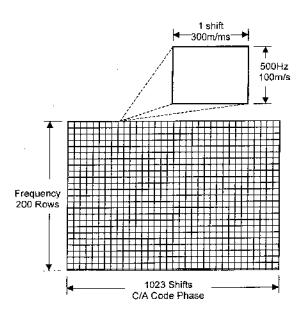

19 SPACECRAFT INSTRUMENTATION

For related information see also 06 Aircraft Instrumentation and 35 Instrumentation and Photography. and Astrionics

20010125600 NASA Dryden Flight Research Center, Edwards, CA USA Wind Advisory System


Curto, Paul A., Inventor, NASA Dryden Flight Research Center, USA; Brown, Gerald E., Inventor, NASA Dryden Flight Research Center, USA; Zysko, Jan A., Inventor, NASA Dryden Flight Research Center, USA; Oct. 30, 2001; 8p; In English Patent Info.: NASA-Case-DRC-09901-6; US-Patent-6,311,107; US-Patent-Appl-SN-606102; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

The present invention is a two-part wind advisory system comprising a ground station at an airfield and an airborne unit placed inside an aircraft. The ground station monitors wind conditions (wind speed, wind direction, and wind gust) at the airfield and transmits the wind conditions and an airfield ID to the airborne unit. The airborne unit identifies the airfield by comparing the received airfield ID with airfield IDs stored in a database. The airborne unit also calculates the headwind and crosswind for each runway in both directions at the airfield using the received wind conditions and runway information stored in the database. The airborne unit then determines a recommended runway for takeoff and landing operations of the aircraft based on th~ runway having the greatest headwind value and displays the airfield ID, wind conditions, and recommended runway to the pilot. Another

embodiment of the present invention includes a wireless internet based airborne unit in which the airborne unit can receive the wind conditions from the ground station over the internet.

Official Gazette of the U.S. Patent and Trademark Office

Airports; Wind Velocity; Wind Direction; Monitors; Display Devices

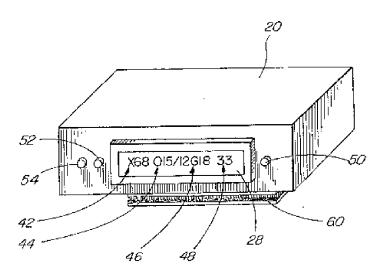

20 SPACECRAFT PROPULSION AND POWER

Includes main propulsion systems and components, e.g., rocket engines; and spacecraft auxiliary power sources. For related information see also 07 Aircraft Propulsion and Power, 28 Propellants and Fuels, 44 Energy Production and Conversion, and 15 Launch Vehicles and Space Vehicles.

20010125613 NASA Marshall Space Flight Center, Huntsville, AL USA

Low-Cost Gas Generator and Ignitor

Dennis, Henry J., Jr., Inventor, NASA Marshall Space Flight Center, USA; Hissam, D. Andy, Inventor, NASA Marshall Space Flight Center, USA; Myers, W. Neill, Inventor, NASA Marshall Space Flight Center, USA; Taylor, Eric S., Inventor, NASA Marshall Space Flight Center, USA; Feb. 20, 2001; 6p; In English


Patent Info.: Filed 18 Jun. 1999; NASA-Case-MFS-31343-1; US-Patent-6,189,315; US-Patent-Appl-SN-350412; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

A gas generator and ignitor assembly for powering a turbine of a turbopump assembly for a rocket engine comprises an injector and a combustion chamber, the injector having a body member including a fuel inlet and an oxidizer inlet spaced one from the other and communicating with respective radially spaced apart annular members in the body member. Three annuli communicate with the fuel inlet and two annuli communicate with the oxidizer inlet, the annuli which communicates with the oxidizer being positioned between pairs of the other annuli, The body member is enclosed by a plate having an array of bores arranged in two series with three radially spaced apart groups of circular rows in each series. The outer series has 28 groups of triplet bores while the inner series has 14 groups of triplet bores. The annuli which communicate with oxidizer feed bores of each series that are between the other bores of a triplet, the latter bores communicating with annuli that communicate with fuel. The inner and outer bores of the triplets of each series are inclined relatively to each other and to the third bore of the triplet so that fuel and oxidizer atomizes as it is sprayed into the inlet of the combustion chamber where the propellants are mixed, and burned.

The burning of the propellants is effected by ignition of a plug of solid propellant fuel mounted to communicate with the interior of the combustion chamber.

Official Gazette of the U.S. Patent and Trademark Office

Gas Generators; Ignition; Turbine Pumps; Annuli

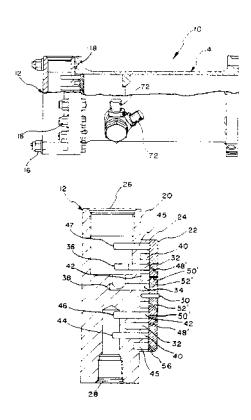

24 COMPOSITE MATERIALS

Includes physical, chemical, and mechanical properties of laminates and other composite materials. For ceramic materials see 27 Nonmetallic Materials.

20010125599 NASA Marshall Space Flight Center, Huntsville, AL USA Composite Tank

DeLay, Thomas K., Inventor, NASA Marshall Space Flight Center, USA; Dec. 12, 2000; 4p; In English


Patent Info.: Filed 22 Dec. 1998; NASA-Case-MFS-31379-1; US-Patent-6,158,605; US-Patent-Appl-SN-218652; No Copyright; Avail: CASI; A01, Hardcopy; A01, Microfiche

A composite tank for containing liquid oxygen and the method of making the same Wherein a water-soluble mandrel having ing the desired tank configuration and a cylindrical protuberance on at least one end is fitted with an inner boss conformance, to the configuration of the mandrel and in outer boss conforming to the configuration of the inner boss, the bosses each having a tubular portion for receiving the protuberance on the mandrel and a spherical portion. The mandrel and the bosses are first coated with a nickel coating. The mandrel is then wrapped with graphite fibers wetted with an epoxy resin and this resin is cured. A layer of insulating foam is then applied to the tank and cured. The insulating foam is machined to a desired concentration and a layer

of aramid fibers wetted with a second epoxy resin is wrapped around the tank. The second resin is cured and the water soluble mandrel is washed from inside the tank.

Official Gazette of the U.S. Patent and Trademark Office

Liquid Oxygen; Tanks (Containers)

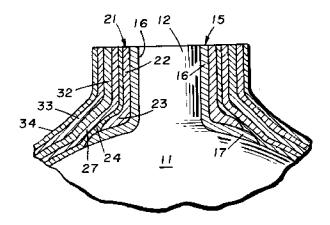

25
INORGANIC, ORGANIC AND PHYSICAL CHEMISTRY

20010097897 NASA Glenn Research Center, Cleveland, OH USA

Polyimides and Process for Preparing Polyimides Having Thermal-Oxidative Stability

Meador, Mary Ann B., Inventor, NASA Glenn Research Center, USA; Aug. 14, 2001; 22p; In English

Patent Info.: Filed 23 Mar. 2000; NASA-Case-LEW-17012-1; US-Patent-6,274,699; US-Patent-Appl-SN-538593; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

Polyimides and the process for preparing polyimides having improved thermal-oxidative stability derived from the polymerization of effective amounts of one or more of the polyamines such as the aromatic diamines, one or more of the tetracarboxylic dianhydrides and a novel dicarboxylic endcap having formula with an R1 group of either hydrogen or an alkyl radical of one to four carbons, an R2 group of either OH, NH2, F, or Cl radical, an R3 group of either H, OH, NH2, F, Cl or an alkylene radical, an R4 group of either an alkyl, aryl, aryloxy, nitro, F, or Cl radical, and/or an R5 group of either H, alkyl, aryl, alkoxy, aryloxy, nitro, F, or Cl radical. The polyimides are useful particularly in the preparation of prepegs and PMR composites. Official Gazette of the U.S. Patent and Trademark Office

Polyimides; Thermal Stability; Polymerization; Diamines; Anhydrides; Dicarboxylic Acids; Organic Chemistry

$$\bigcap_{Q} \bigcap_{Q} \bigcap_{Q$$

26 METALS AND METALLIC MATERIALS

20010097904 NASA Johnson Space Center, Houston, TX USA

Vapor Corrosion Cell and Method of Using Same


Davis, Dennis D., Inventor, NASA Johnson Space Center, USA; Jul. 10, 2001; 8p; In English

Patent Info.: Filed 15 Apr. 1999; NASA-Case-MSC-22871-1; US-Patent-6,258,253; US-Patent-Appl-SN-292237; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

The present invention provides a vapor corrosion cell for a real-time and quantitative measurement of corrosion of conductive materials in atmospheres containing chemically reactive gases and water vapor. Two prototypes are provided. Also provided are various applications of this apparatus in industry.

Official Gazette of the U.S. Patent and Trademark Office

Corrosion; Water Vapor; Gases; Prototypes; Electrochemistry; Real Time Operation; Gas-Metal Interactions

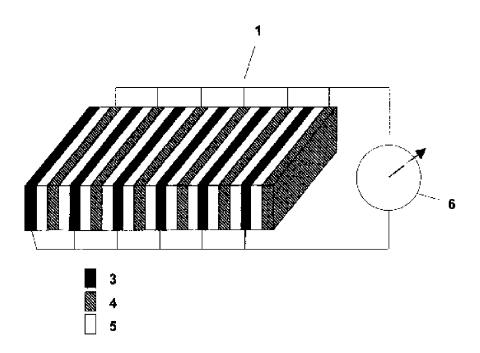

20010110765 NASA Glenn Research Center, Cleveland, OH USA

Shape Memory Alloy Actuator

Baumbick, Robert J., Inventor, NASA Glenn Research Center, USA; Nov. 28, 2000; 7p; In English


Patent Info.: Filed 6 Apr. 1999; NASA-Case-LEW-16685-1; US-Patent-6,151,897; US-Patent-Appl-SN-286877; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

The present invention discloses and teaches a unique, remote optically controlled micro actuator particularly suitable for aerospace vehicle applications wherein hot gas, or in the alternative optical energy, is employed as the medium by which shape

memory alloy elements are activated. In gas turbine powered aircraft the source of the hot gas may be the turbine engine compressor or turbine sections.

Official Gazette of the U.S. Patent and Trademark Office

Actuators; Aerospace Vehicles; Shape Memory Alloys; Remote Control

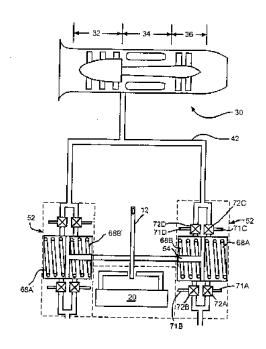

27 NONMETALLIC MATERIALS

Includes physical, chemical, and mechanical properties of plastics, elastomers, lubricants, polymers, textiles, adhesives, and ceramic materials. For composite materials see 24 Composite Materials.

20010073954 NASA Langley Research Center, Hampton, VA USA

Reflective Self-Metallizing Polyimide Films

Thompson, David W., Inventor, NASA Langley Research Center, USA; Caplan, Maggie L., Inventor, NASA Langley Research Center, USA; St.Clair, Anne, Inventor, NASA Langley Research Center, USA; Oct. 14, 1997; 5p; In English

Patent Info.: Filed 14 Jun. 1995; NASA-Case-LAR-15272-1; US-Patent-5,677,418; US-Patent-Appl-SN-490290; No Copyright; Avail: US Patent and Trademark Office, Hardcopy, Microfiche

A silver organic complex, such as silver acetate, is solubilized in a polyamic acid resin or soluble polyimide solution using a suitable solvent such as hexafluoroacetyl acetone. The mixture is stable and can be applied to both flat and contoured surfaces. Application can be performed by casting, dip-coating, spraying, or other suitable techniques. In addition, the mixture can be cast or extruded as a polyimide film which is not applied to an underlying substrate. Upon curing, a flexible silver coated polyimide film is produced.

Official Gazzette of the U.S. Patent and Trademark

Polyimides; Polymeric Films; Reflectance; Thermal Stability; Abrasion Resistance

20010094779 NASA Glenn Research Center, Cleveland, OH USA

Triamine-Modified Polyimides Having Improved Processability and Low Melt Flow Viscosity

Meador, Michael A., Inventor, NASA Glenn Research Center, USA; Nguyen, Baochan N., Inventor, NASA Glenn Research Center, USA; Eby, Ronald K., Inventor, NASA Glenn Research Center, USA; Jul. 17, 2001; 19p; In English; Provisional

US-Patent-Appl-SN-118479, filed 3 Feb. 1999

Patent Info.: Filed 1 Feb. 2000; NASA-Case-LEW-16968-1; US-Patent-6,262,223; US-Patent-Appl-SN-495599; US-Patent-Appl-SN-118479; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

Addition-cured polyimides that contain the reaction product of an aromatic triamine or trianhydride analogue thereof, a reactive end group such as 5-norbornene-2, 3-dicarboxylic acid, ester derivatives of 5-norbornene-2, 3-dicarboxylic acid, anhydride derivatives of 5-norbornene-2, 3-dicarboxylic acid, or 4-phenylethynylphthalic anhydride, an aromatic diamine, and a dialkyl ester of an aromatic tetracarboxylic acid. The resultant starlike polyimides; exhibit lower melt flow viscosity than its linear counterparts, providing for improved processability of the polyimide. Also disclosed are methods for the synthesis of these polyimides as well as composite structures formed using these polyimides.

Author

Composite Structures; Diamines; Polyimides; Production Engineering

20010111095 NASA Glenn Research Center, Cleveland, OH USA

Polyimides and Process For Preparing Polyimides Having Improved Thermal-Oxidative Stability

Meador, Mary Ann B., Inventor, NASA Glenn Research Center, USA; Frimer, Aryeh A., Inventor, NASA Glenn Research Center, USA; Oct. 16, 2001; 12p; In English

Patent Info.: Filed 23 Mar. 2000; NASA-Case-LEW-16987-1; US-Patent-6,303,744; US-Patent-Appl-SN-535663; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

Polyimides and the process for preparing polyimides having improved thermal-oxidative stability derived from the polymerization of effective amounts of one or more of the polyamines such as the aromatic diamines, one or more of the tetracarboxylic dianhydrides and a novel dicarboxylic endcap having formula with an R1 group of either hydrogen or an alkyl radical of one to four carbons, an R2 group of either OH, NH2, F, or Cl radical, an R3 group of either H, OH, NH2, F, Cl or an alkylene radical, an R4 group of either an alkyl, aryl, aryloxy, nitro, F, or Cl radical, and/or an R5 group of either H, alkyl, aryl, alkoxy, aryloxy, nitro, F, or Cl radical. The polyimides are useful particularly in the preparation of prepegs and PMR composites. Official Gazette of the U.S. Patent and Trademark Office

Polyimides; Thermal Stability; Polymerization; Diamines; Anhydrides; Dicarboxylic Acids; Organic Chemistry

20010111101 NASA Langley Research Center, Hampton, VA USA

Method to Prepare Processable Polyimides With Reactive Endogroups Using 1,3-bis(3-aminophenoxy)benzene Jensen, Brian J., Inventor, NASA Langley Research Center, USA; Sep. 11, 2001; 12p; In English; Continuation of US-Patent-Appl-SN-342462, filed 29 Jun. 1999 which is a provisional of US-Patent-Appl-SN-090990, filed 29 Jun. 1998 Patent Info.: Filed 21 Sep. 2000; NASA-Case-LAR-15449; US-Patent-6,288,209; US-Patent-Appl-SN-667426; US-Patent-Appl-SN-342462; US-Patent-Appl-SN-090990; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

Polyimide copolymers were obtained containing 1,3-bis(3-aminophenoxy)benzene (APB) and other diamines and dianhydrides and terminating with the appropriate amount of a non-reactive endcapper, such as phthalic anhydride. Homopolymers containing only other diamines and dianhydrides which are not processable under conditions described previously can be made processable by incorporating various amounts of APB, depending on the chemical structures of the diamines and dianhydrides used. Polyimides that are more rigid in nature require more APB to impart processability than polyimides that are less rigid in nature. The copolymers that result from using APB to enhance processability have a unique combination of properties including excellent thin film properties, low pressure processing (200 psi and below), improved toughness, improved solvent resistance, improved adhesive properties, improved composite mechanical properties, long term melt stability (several hours at 390 C), and lower melt viscosities.

Official Gazette of the U.S. Patent and Trademark Office

Polyimides; Copolymers; Anhydrides; Benzene

28 PROPELLANTS AND FUELS

Includes rocket propellants, igniters, and oxidizers; their storage and handling procedures; and aircraft fuels. For related information see also 07 Aircraft Propulsion and Power, 20 Spacecraft Propulsion and Power, and 44 Energy Production and Conversion.

20010125605 NASA Glenn Research Center, Cleveland, OH USA

Reduced Toxicity Fuel Satellite Propulsion System Including Axial Thruster and ACS Thruster Combination Schneider, Steven J., Inventor, NASA Glenn Research Center, USA; Nov. 06, 2001; 30p; In English; Division of US-Patent-


Appl-SN-291883, filed 14 Apr. 1999

Patent Info.: Filed 17 Apr. 2001; NASA-Case-LEW-16636-5; US-Patent-6,311,477; US-Patent-Appl-SN-837820; US-Patent-Appl-SN-291883; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A reduced toxicity fuel satellite propulsion system including a reduced toxicity propellant supply for consumption in an axial class thruster and an ACS class thruster. The system includes suitable valves and conduits for supplying the reduced toxicity propellant to the ACS decomposing element of an ACS thruster. The ACS decomposing element is operative to decompose the reduced toxicity propellant into hot propulsive gases. In addition the system includes suitable valves and conduits for supplying the reduced toxicity propellant to an axial decomposing element of the axial thruster. The axial decomposing element is operative to decompose the reduced toxicity propellant into hot gases. The system further includes suitable valves and conduits for supplying a second propellant to a combustion chamber of the axial thruster, whereby the hot gases and the second propellant auto-ignite and begin the combustion process for producing thrust.

Official Gazette of the U.S. Patent and Trademark Office

Combustion Chambers; Decomposition; Ignition; Propellant Combustion; Propellant Consumption; Reaction Kinetics; Toxicity

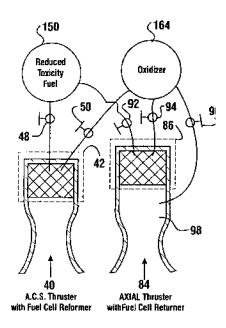

32 COMMUNICATIONS AND RADAR

Includes radar; land and global communications; communications theory; and optical communications. For related information see also 04 Aircraft Communications and Navigation and 17 Space Communications, Spacecraft Communications, Command and Tracking. For search and rescue see 03 Air Transportation and Safety, and 16 Space Transportation.

20010094776 NASA Langley Research Center, Hampton, VA USA

Piezoelectric Vibrational and Acoustic Alert for a Personal Communication Device

Woodard, Stanley E., Inventor, NASA Langley Research Center, USA; Hellbaum, Richard F., Inventor, NASA Langley Research Center, USA; Daugherty, Robert H., Inventor, NASA Langley Research Center, USA; Scholz, Raymond C., Inventor, NASA Langley Research Center, USA; Fox, Robert L., Inventor, NASA Langley Research Center, USA; Denhardt, Gerald A., Inventor, NASA Langley Research Center, USA; Jang, SeGon, Inventor, NASA Langley Research Center, USA; Jang, SeGon, Inventor, NASA Langley Research Center, USA; Jul. 10, 2001; 13p; In English; Continuation-in-part of US-Patent-Appl-SN-344030, filed 25 Jun. 1999 and provisional of US-Patent-Appl-SN-098658, filed 31 Aug. 1998


Patent Info.: Filed 31 Aug. 1999; NASA-Case-LAR-15764-1; US-Patent-6,259,188; US-Patent-Appl-SN-386682; US-Patent-

Appl-SN-344030; US-Patent-Appl-SN-098658; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

An alert apparatus for a personal communication device includes a mechanically prestressed piezoelectric wafer positioned within the personal communication device and an alternating voltage input line coupled at two points of the wafer where polarity is recognized. The alert apparatus also includes a variable frequency device coupled to the alternating voltage input line, operative to switch the alternating voltage on the alternating voltage input line at least between an alternating voltage having a first frequency and an alternating voltage having a second frequency. The first frequency is preferably sufficiently high so as to cause the wafer to vibrate at a resulting frequency that produces a sound perceptible by a human ear, and the second frequency is preferably sufficiently low so as to cause the wafer to vibrate at a resulting frequency that produces a vibration readily felt by a holder of the personal communication device.

Author

Communication Equipment; Frequencies; Piezoelectricity; Signal Transmission; Wafers

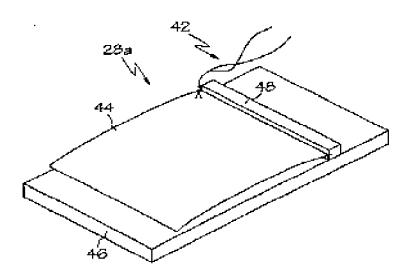

20010095540 NASA Pasadena Office, CA USA

Satellite-Tracking Millimeter-Wave Reflector Antenna System For Mobile Satellite-Tracking

Densmore, Arthur C., Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Jamnejad, Vahraz, Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Woo, Kenneth E., Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Jun. 12, 2001; 24p; In English; Reissue of US-Patent-Appl-SN-999796, filed 30 Nov. 1992


Patent Info.: Filed 15 Feb. 1996; NASA-Case-NPO-18772-R; US-Patent-R,E37,218; US-Patent-Appl-SN-613739; US-Patent-Appl-SN-999794; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A miniature dual-band two-way mobile satellite-tracking antenna system mounted on a movable vehicle includes a miniature parabolic reflector dish having an elliptical aperture with major and minor elliptical axes aligned horizontally and vertically, respectively, to maximize azimuthal directionality and minimize elevational directionality to an extent corresponding to expected pitch excursions of the movable ground vehicle. A feed-horn has a back end and an open front end facing the reflector dish and has vertical side walls opening out from the back end to the front end at a lesser horn angle and horizontal top and bottom walls opening out from the back end to the front end at a greater horn angle. An RF circuit couples two different signal bands between the feed-horn and the user. An antenna attitude controller maintains an antenna azimuth direction relative to the satellite by rotating it in azimuth in response to sensed yaw motions of the movable ground vehicle so as to compensate for the yaw motions to within a pointing error angle. The controller sinusoidally dithers the antenna through a small azimuth dither angle greater than the

pointing error angle while sensing a signal from the satellite received at the reflector dish, and deduces the pointing angle error from dither-induced fluctuations in the received signal.

Official Gazette of the U.S. Patent and Trademark Office

Antenna Design; Millimeter Waves; Reflector Antennas; Satellite Tracking; Portable Equipment; Miniature Electronic Equipment

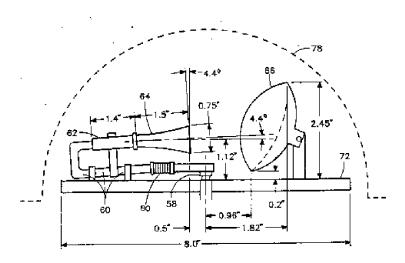

20010098307 NASA Glenn Research Center, Cleveland, OH USA

Multi-Mode Broadband Patch Antenna


Romanofsky, Robert R., Inventor, NASA Glenn Research Center, USA; Sep. 18, 2001; 18p; In English

Patent Info.: Filed 4 May 2000; NASA-Case-LEW-16792-1; US-Patent-6,292,143; US-Patent-Appl-SN-566839; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A multi-mode broad band patch antenna is provided that allows for the same aperture to be used at independent frequencies such as reception at 19 GHz and transmission at 29 GHz. Furthermore, the multi-mode broadband patch antenna provides a ferroelectric film that allows for tuning capability of the multi-mode broadband patch antenna over a relatively large tuning range. The alternative use of a semiconductor substrate permits reduced control voltages since the semiconductor functions as a counter electrode.

Author

Broadband; Patch Antennas; Ferroelectricity; Tuning; Semiconductors (Materials); Microwave Transmission

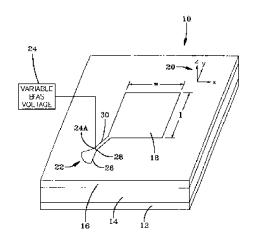

20010111098 NASA Johnson Space Center, Houston, TX USA


Transcatheter Microwave Antenna

Arndt, Dickey G., Inventor, NASA Johnson Space Center, USA; Carl, James R., Inventor, NASA Johnson Space Center, USA; Ngo, Phong, Inventor, NASA Johnson Space Center, USA; Raffoul, George W., Inventor, NASA Johnson Space Center, USA; Sep. 11, 2001; 14p; In English; Continuation-in-part of US-Patent-Appl-SN-154989, filed 17 Sep. 1998; US-Patent-Appl-SN-162457, filed 16 Sep. 1998; US-Patent-Appl-SN-154622, filed 16 Sep. 1998; US-Patent-Appl-SN-641045, filed 17 Apr. 1996 Patent Info.: Filed 23 Feb. 2000; NASA-Case-MSC-23049-1; US-Patent-6,289,249; US-Patent-Appl-SN-511961; US-Patent-Appl-SN-154989; US-Patent-Appl-SN-162457; US-Patent-Appl-SN-154622; US-Patent-Appl-SN-641045; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A method, simulation, and apparatus are provided that are highly suitable for treatment of benign prostatic hyperplasia (BPH). A catheter is disclosed that includes a small diameter disk loaded monopole antenna surrounded by fusion material having a high heat of fusion and a melting point preferably at or near body temperature. Microwaves from the antenna heat prostatic tissue to promote necrosing of the prostatic tissue that relieves the pressure of the prostatic tissue against the urethra as the body reabsorbs the necrosed or dead tissue. The fusion material keeps the urethra cool by means of the heat of fusion of the fusion material. This prevents damage to the urethra while the prostatic tissue is necrosed. A computer simulation is provided that can be used to predict the resulting temperature profile produced in the prostatic tissue, by changing the various control features of the catheter and method of applying microwave energy a temperature profile can be predicted and produced that is similar to the temperature profile desired for the particular patient.

Official Gazette of the U.S. Patent and Trademark Office

Catheterization; Microwave Antennas; Prostate Gland; Medical Equipment; Tissues (Biology)

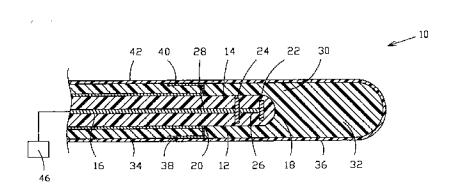

33 ELECTRONICS AND ELECTRICAL ENGINEERING

Includes test equipment and maintainability; components, e.g., tunnel diodes and transistors; microminiaturization; and integrated circuitry. For related information see also 60 Computer Operations and Hardware and 76 Solid-State Physics.

20010094780 NASA Glenn Research Center, Cleveland, OH USA

Method of Making a Nickel Fiber Electrode for a Nickel Based Battery System

Britton, Doris L., Inventor, NASA Glenn Research Center, USA; Jul. 24, 2001; 8p; In English


Patent Info.: Filed 27 Oct. 1994; NASA-Case-LEW-15817-1; US-Patent-6,265,112; US-Patent-Appl-SN-331067; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

The general purpose of the invention is to develop a high specific energy nickel electrode for a nickel based battery system. The invention discloses a method of producing a lightweight nickel electrode which can be cycled to deep depths of discharge

(i.e., 40% or greater of electrode capacity). These deep depths of discharge can be accomplished by depositing the required amount of nickel hydroxide active material into a lightweight nickel fiber substrate.

Author

Electric Discharges; Electrodes; Inventions; Fabrication; Nickel Hydrogen Batteries

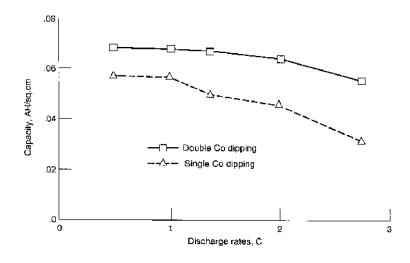

20010096172 NASA Glenn Research Center, Cleveland, OH USA


Gas Sensing Diode Comprising SiC

Hunter, Gary William, Inventor, NASA Glenn Research Center, USA; Sep. 18, 2001; 6p; In English; Division of US-Patent-Appl-SN-093840, filed 29 May 1998

Patent Info.: NASA-Case-LEW-16519-2; US-Patent-6,291,838; US-Patent-Appl-SN-448406; US-Patent-Appl-SN-093840; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

A diode for sensing hydrogen and hydrocarbons and the process for manufacturing the diode are disclosed. The diode is a Schottky diode which has a palladium chrome contact on the C-face of an n-type 6H Silicon carbide epilayer. The epilayer is grown on the C-face of a 6H silicon carbide substrate. The diode is capable of measuring low concentrations of hydrogen and hydrocarbons at high temperatures, for example, 800 degrees C. The diode is both sensitive and stable at elevated temperatures. Official Gazette of the U.S. Patent and Trademark Office

Detection; Gas Analysis; Hydrocarbons; Hydrogen; Manufacturing; Schottky Diodes; Silicon Carbides

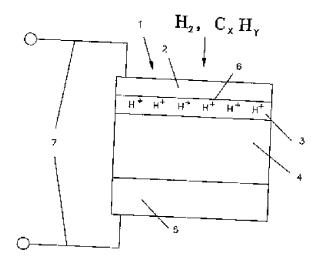

20010097878 NASA Pasadena Office, CA USA

Battery Cell By-Pass Circuit


Evers, Jeffrey, Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Gelger, Ronald V., Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Aug. 07, 2001; 6p; In English

Patent Info.: Filed 5 Jul. 2000; NASA-Case-NPO-30270-1; US-Patent-6,271,646; US-Patent-Appl-SN-610351; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

The invention is a circuit and method of limiting the charging current voltage from a power supply net work applied to an individual cell of a plurality of cells making up a battery being charged in series. It is particularly designed for use with batteries that can be damaged by overcharging, such as Lithium-ion type batteries. In detail, the method includes the following steps: 1) sensing the actual voltage level of the individual cell; 2) comparing the actual voltage level of the individual cell with a reference value and providing an error signal representative thereof; and 3) by-passing the charging current around individual cell necessary to keep the individual cell voltage level generally equal a specific voltage level while continuing to charge the remaining cells. Preferably this is accomplished by by-passing the charging current around the individual cell if said actual voltage level is above the specific voltage level and allowing the charging current to the individual cell if the actual voltage level is equal or less than the specific voltage level. In the step of bypassing the charging current, the by-passed current is transferred at a proper voltage level to the power supply. The by-pass circuit a voltage comparison circuit is used to compare the actual voltage level of the individual cell with a reference value and to provide an error signal representative thereof. A third circuit, designed to be responsive to the error signal, is provided for maintaining the individual cell voltage level generally equal to the specific voltage level. Circuitry is provided in the third circuit for bypassing charging current around the individual cell if the actual voltage level is above the specific voltage level and transfers the excess charging current to the power supply net work. The circuitry also allows charging of the individual cell if the actual voltage level is equal or less than the specific voltage level.

Official Gazette of the U.S. Patent and Trademark Office

Circuits; Electric Potential; Electric Batteries; Electric Charge; Bypasses

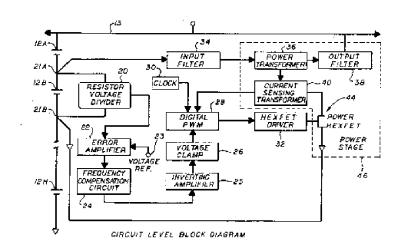

20010097898 NASA Glenn Research Center, Cleveland, OH USA

Processes For Cleaning a Cathode Tube and Assemblies In A Hollow Cathode Assembly

Patterson, Michael J., Inventor, NASA Glenn Research Center, USA; Verhey, Timothy R. R., Inventor, NASA Glenn Research Center, USA; Soulas, George C., Inventor, NASA Glenn Research Center, USA; Jun. 05, 2001; 20p; In English; Division of US-Patent-Appl-SN-152407, filed 14 Sep. 1998


Patent Info.: Filed 14 Feb. 2000; NASA-Case-LEW-16056-2; US-Patent-6,240,932; US-Patent-Appl-SN-503658; US-Patent-Appl-SN-152407; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

The present invention is a process for cleaning a cathode tube and other subassemblies in a hollow cathode assembly. In the disclosed process, hand covering elastomer gloves are used for handling all cathode assembly parts. The cathode tube and other subassemblies are cleaned with a lint-free cloth damped with acetone, then wiped with alcohol, immersed in ethyl alcohol or

acetone, and ultrasonic agitation is applied, heating to 60 C. for ethyl alcohol or 56 C. for acetone. The cathode tube and other subassemblies are dried by blowing with nitrogen gas.

Official Gazette of the U.S. Patent and Trademark Office

Hollow Cathodes; Tube Cathodes; Elastomers; Gloves; Subassemblies; Ultrasonic Agitation; Chemical Sterilization

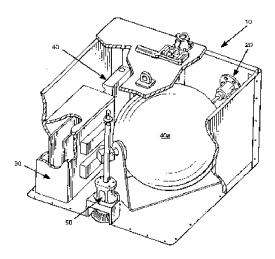

20010110720 NASA Pasadena Office, CA USA

Protective Fullerene (C60) Packaging System for Microelectromechanical Systems Applications


Olivas, John D., Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Aug. 21, 2001; 6p; In English

Patent Info.: Filed 3 May 1999; NASA-Case-NPO-20148-2; US-Patent-6,277,438; US-Patent-Appl-SN-310774; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

The invention involves a method for locating the probe of a scanning tunneling micrograph a predetermined distance from its conducting surface, and specifically the deposition of a monolayer of fullerene C60 onto the conducting plate. The Fullerene C60 molecule is approximately spherical and a monolayer of fullerene has a thickness of one nanometer, by providing a monolayer of fullerene on the conducting surface and locating the probe on the surface of the monolayer, a distance of one nanometer can be established between the probe tip and the conducting surface.

Official Gazette of the U.S. Patent and Trademark Office

Fullerenes; Microelectromechanical Systems; Packaging; Metal Surfaces

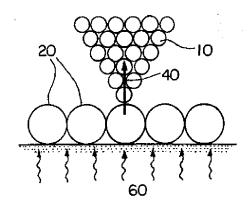

20010110766 NASA Goddard Space Flight Center, Greenbelt, MD USA

Method and Apparatus for High Data Rate Demodulation


Grebowsky, Gerald J., Inventor, NASA Goddard Space Flight Center, USA; Gray, Andrew A., Inventor, NASA Goddard Space Flight Center, USA; Srinivasan, Meera, Inventor, NASA Goddard Space Flight Center, USA; Jan. 23, 2001; 38p; In English; Provisional application of US-Patent-Appl-SN-094953, filed 31 Jul. 1998

Patent Info.: Filed 30 Jul. 1999; NASA-Case-GSC-13963-1; US-Patent-6,177,835; US-Patent-Appl-SN-363883; US-Patent-Appl-SN-094963; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A method to demodulate BPSK or QPSK data using clock rates for the receiver demodulator of one-fourth the data rate is presented. This is accomplished through multirate digital signal processing techniques. The data is sampled with an analog-to-digital converter and then converted from a serial data stream to a parallel data stream. This signal processing requires a clock cycle four times the data rate. Once converted into a parallel data stream, the demodulation operations including complex baseband mixing, lowpass filtering, detection filtering, symbol-timing recovery, and carrier recovery are all accomplished at a rate one-fourth the data rate. The clock cycle required is one-sixteenth that required by a traditional serial receiver based on straight convolution. The high rate data demodulator will demodulate BPSK, QPSK, UQPSK, and DQPSK with data rates ranging from 10 Mega-symbols to more than 300 Mega-symbols per second. This method requires less clock cycles per symbol tan traditional serial convolution techniques.

Official Gazette of the U.S. Patent and Trademark Office

Demodulation; Methodology; Data Flow Analysis

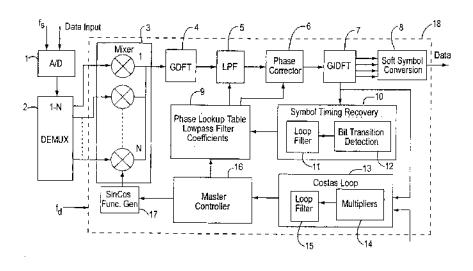

20010110768 NASA Goddard Space Flight Center, Greenbelt, MD USA

Chip for CCSDS Compatible Serial Data Streams


Dowling, Jason T., Inventor, NASA Goddard Space Flight Center, USA; Jan. 23, 2001; 18p; In English; Provisional application of US-Patent-Appl-SN-029333, filed 30 Oct. 1996

Patent Info.: Filed 29 Oct. 1997; NASA-Case-GSC-13890-1; US-Patent-6,178,470; US-Patent-Appl-SN-960355; US-Patent-Appl-SN-029333; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A configurable service processor for telemetry ground stations is totally implemented in VLSI/ASIC hardware and finds use in spacecraft systems and other communications systems that operate according to CCSDS and CCSDS-like protocols. The service processor performs the traditional functions of data extraction at very high data and packet rates.

Official Gazette of the U.S. Patent and Trademark Office

Data Flow Analysis; Chips (Electronics); Telemetry

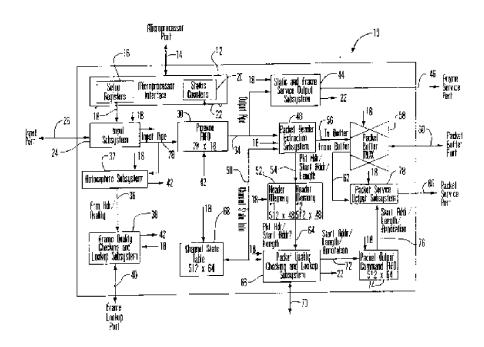

20010111086 NASA Pasadena Office, CA USA

Battery Cell By-Pass Circuit

Mumaw, SUSAn J., Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Evers, Jeffrey, Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Craig, Calvin L., Jr., Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Walker, Stuart D., Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Apr. 03, 2001; 6p; In English


Patent Info.: Filed 12 Jan. 2000; NASA-Case-NPO-30305-1T; US-Patent-6,211,650; US-Patent-Appl-SN-482150; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

The invention is a circuit and method of limiting the charging current voltage from a power supply net work applied to an individual cell of a plurality of cells making up a battery being charged in series. It is particularly designed for use with batteries that can be damaged by overcharging, such as Lithium-ion type batteries. In detail, the method includes the following steps: 1) sensing the actual voltage level of the individual cell; 2) comparing the actual voltage level of the individual cell with a reference value and providing an error signal representative thereof; and 3) by-passing the charging current around individual cell necessary to keep the individual cell voltage level generally equal a specific voltage level while continuing to charge the remaining cells. Preferably this is accomplished by by-passing the charging current around the individual cell if said actual voltage level is above the specific voltage level and allowing the charging current to the individual cell if the actual voltage level is equal or less than the specific voltage level. In the step of bypassing the charging current, the by-passed current is transferred at a proper voltage level to the power supply. The by-pass circuit a voltage comparison circuit is used to compare the actual voltage level of the individual cell with a reference value and to provide an error signal representative thereof. A third circuit, designed to be responsive to the error signal, is provided for maintaining the individual cell voltage level generally equal to the specific voltage level. Circuitry is provided in the third circuit for bypassing charging current around the individual cell if the actual voltage level

is above the specific voltage level and transfers the excess charging current to the power supply net work. The circuitry also allows charging of the individual cell if the actual voltage level is equal or less than the specific voltage level.

Official Gazette of the U.S. Patent and Trademark Office

Circuits; Electric Potential; Electric Batteries; Electric Charge; Bypasses

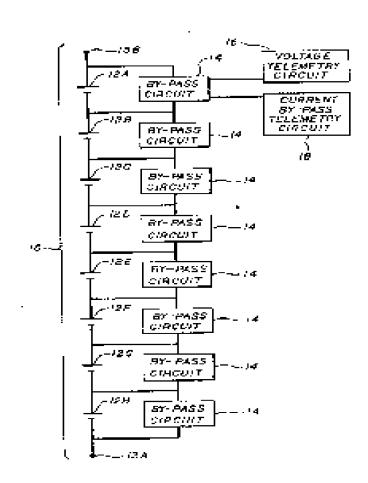

20010111099 NASA Johnson Space Center, Houston, TX USA

Microstrip Patch Antenna and Method

Fink, Patrick W., Inventor, NASA Johnson Space Center, USA; Sep. 11, 2001; 12p; In English


Patent Info.: Filed 23 Nov. 1999; NASA-Case-MSC-23089-1; US-Patent--6,288,677; US-Patent-Appl-SN-451814; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

Method and apparatus are provided for a microstrip feeder structure for supplying properly phased signals to each radiator element in a microstrip antenna array that may be utilized for radiating circularly polarized electromagnetic waves. In one disclosed embodiment, the microstrip feeder structure includes a plurality of microstrip sections many or all of which preferably have an electrical length substantially equal to one-quarter wavelength at the antenna operating frequency. The feeder structure

provides a low loss feed structure that may be duplicated multiple times through a set of rotations and translations to provide a radiating array of the desired size.

Official Gazette of the U.S. Patent and Trademark Office

Patch Antennas; Microstrip Antennas; Feeders; Antenna Arrays; Electromagnetic Radiation

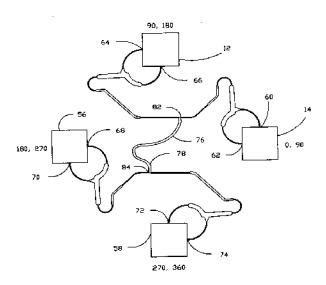

20010125601 NASA Marshall Space Flight Center, Huntsville, AL USA

Power Divider for Harmonically Rich Waveforms


Sims, William Herbert, III, Inventor, NASA Marshall Space Flight Center, USA; Nov. 20, 2001; 12p; In English

Patent Info.: Filed 29 Oct. 1998; NASA-Case-MFS-31186-1; US-Patent-6,320,478; US-Patent-Appl-SN-182553; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A power divider divides an RF signal into two output signals having a phase difference of 180 deg. or a multiple thereof. When the RF signal is a square wave or another harmonically rich signal, the phases of the fundamental and the harmonics have the proper relationship. The divider can be implemented in the form of microstrips on a board, with one of the output microstrips having several bends to provide a different electrical length from the other.

Official Gazette of the U.S. Patent and Trademark Office

Radio Frequencies; Dividers

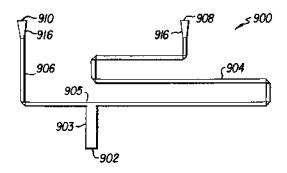

35 INSTRUMENTATION AND PHOTOGRAPHY

Includes remote sensors; measuring instruments and gages; detectors; cameras and photographic supplies; and holography. For aerial photography see 43 Earth Resources and Remote Sensing. For related information see also 06 Aircraft Instrumentation, and 19 Space Instrumentation.

20010096161 NASA Langley Research Center, Hampton, VA USA

Multi-Channel Electronically Scanned Cryogenic Pressure Sensor and Method For Making Same


Chapman, John J., Inventor, NASA Langley Research Center, USA; Hopson, Purnell, Jr., Inventor, NASA Langley Research Center, USA; Holloway, Nancy M., Inventor, NASA Langley Research Center, USA; Jun. 19, 2001; 28p; In English; Continuation-in-part of abandoned US-Patent-Appl-SN-944026, filed 25 Aug. 1997 which is a continuation-in-part of abandoned US-Patent-Appl-SN-416596, filed 4 Apr. 1995

Patent Info.: Filed 13 Jan. 1999; NASA-Case-LAR-15939-1; US-Patent-6,247,369; US-Patent-Appl-SN-229931; US-Patent-Appl-SN-944026; US-Patent-Appl-SN-416596; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A miniature, multi-channel, electronically scanned pressure measuring device uses electrostatically bonded silicon dies in a multi-element array. These dies are bonded at specific sites on a glass, pre-patterned substrate. Thermal data is multiplexed and recorded on each individual pressure measuring diaphragm. The device functions in a cryogenic environment without the need of heaters to keep the sensor at constant temperatures.

Official Gazette of the U.S. Patent and Trademark Office

Miniaturization; Pressure Measurement; Pressure Sensors

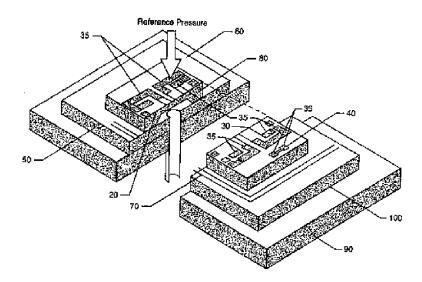

20010111094 NASA Dryden Flight Research Center, Edwards, CA USA

Alumina Encapsulated Strain Gage Not Mechanically Attached to The Substrate, Used to Temperature Compensate an Active High Temperature Gage In A Half-Bridge Configuration

Piazza, Anthony, Inventor, NASA Dryden Flight Research Center, USA; Oct. 16, 2001; 12p; In English


Patent Info.: Filed 17 Dec. 1998; NASA-Case-DRC-09607-4; US-Patent-6,301,775; US-Patent-Appl-SN-252622; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A temperature compensation element for a high-temperature strain gage and the method of fabricating the same. Preferably, the element is a "dummy" strain gage not mechanically attached to the substrate. The element is encapsulated in an insulative material and used to compensate an active high-temperature strain gage and wired in a half-bridge configuration. The temperature compensation element and high-temperature strain gage are fabricated using the method of the present invention. This method includes temporarily adhering the element to a heat sink, encapsulated in an insulative material and then removed from the heat

sink. Next, the element is either stacked or placed near the active gage. Ideally, the element and the active gage have substantially similar heat transfer and electrical properties.

Official Gazette of the U.S. Patent and Trademark Office

Aluminum Oxides; Strain Gages; Temperature Compensation; High Temperature; Heat Sinks

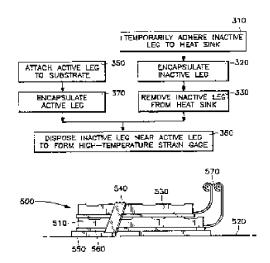

20010111097 NASA Johnson Space Center, Houston, TX USA

Non-Intrusive Pressure/Multipurpose Sensor and Method


Smith, William C., Inventor, NASA Johnson Space Center, USA; Oct. 16, 2001; 16p; In English

Patent Info.: Filed 30 Apr. 1999; NASA-Case-MSC-22738-1; US-Patent-6,301,973; US-Patent-Appl-SN-302976; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

Method and apparatus are provided for determining pressure using a non-intrusive sensor that is easily attachable to the plumbing of a pressurized system. A bent mode implementation and a hoop mode implementation of the invention are disclosed. Each of these implementations is able to nonintrusively measure pressure while fluid is flowing. As well, each implementation may be used to measure mass flow rate simultaneously with pressure. An ultra low noise control system is provided for making pressure measurements during gas flow. The control system includes two tunable digital bandpass filters with center frequencies that are responsive to a clock frequency. The clock frequency is divided by a factor of N to produce a driving vibrational signal for resonating a metal sensor section.

Official Gazette of the U.S. Patent and Trademark Office

Nonintrusive Measurement; Pressure Measurement; Pressure Sensors; Mass Flow Rate

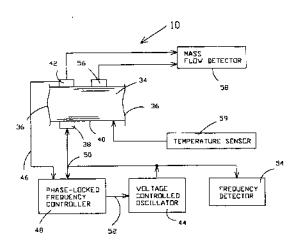

20010125616 NASA Marshall Space Flight Center, Huntsville, AL USA

System and Method for Determining Rate of Rotation Using Brushless DC Motor


Howard, David E., Inventor, NASA Marshall Space Flight Center, USA; Smith, Dennis A., Inventor, NASA Marshall Space Flight Center, USA; Nov. 07, 2000; 6p; In English

Patent Info.: Filed 27 Jul. 1998; NASA-Case-MFS-31143-1; US-Patent-6,144,198; US-Patent-Appl-SN-128634; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

A system and method are provided for measuring rate of rotation. A brushless DC motor is rotated and produces a back electromagnetic force (emf) on each winding thereof. Each winding's back-emf is squared. The squared outputs associated with each winding are combined, with the square root being taken of such combination, to produce a DC output proportional only to the rate of rotation of the motor's shaft.

Official Gazette of the U.S. Patent and Trademark Office

Shafts (Machine Elements); Speed Indicators

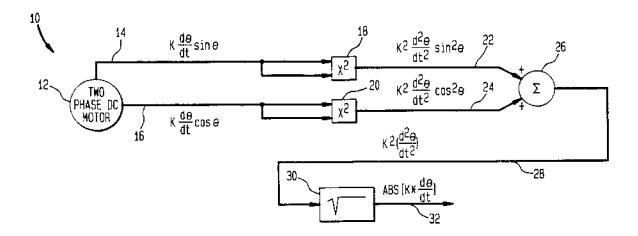

20010125617 NASA Langley Research Center, Hampton, VA USA

Cryogenic, Absolute, High Pressure Sensor

Chapman, John J., Inventor, NASA Langley Research Center, USA; Shams. Qamar A., Inventor, NASA Langley Research Center, USA; Powers, William T., Inventor, NASA Langley Research Center, USA; Jun. 05, 2001; 8p; In English; Continuation of abandoned US-Patent-Appl-SN-681245, filed 22 Jul. 1996


Patent Info.: Filed 10 Dec. 1996; NASA-Case-LAR-15280-2-SB; US-Patent-6,240,785; US-Patent-Appl-SN-778065; US-Patent-Appl-SN-681245; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

A pressure sensor is provided for cryogenic, high pressure applications. A highly doped silicon piezoresistive pressure sensor is bonded to a silicon substrate in an absolute pressure sensing configuration. The absolute pressure sensor is bonded to an aluminum nitride substrate. Aluminum nitride has appropriate coefficient of thermal expansion for use with highly doped silicon

at cryogenic temperatures. A group of sensors, either two sensors on two substrates or four sensors on a single substrate are packaged in a pressure vessel.

Official Gazette of the U.S. Patent and Trademark Office

Cryogenic Temperature; Detection; High Pressure; Pressure Sensors

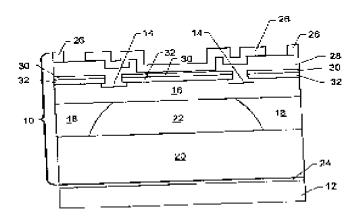

20010125619 NASA Langley Research Center, Hampton, VA USA

Thickness Measurement Device for Ice, or Ice Mixed with Water or Other Liquid


Weinstein, Leonard M., Inventor, NASA Langley Research Center, USA; May 29, 2001; 11p; In English; Continuation-in-part of abandoned US-Patent-Appl-SN-060590, filed 15 Apr. 1998, which is a continuation-in-part of US-Patent-Appl-SN-619779, filed 20 Mar. 1996

Patent Info.: Filed 4 Apr. 2000; NASA-Case-LAR-16093-1; US-Patent-6,239,601; US-Patent-Appl-SN-545860; US-Patent-Appl-SN-060590; US-Patent-Appl-SN-619779; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A Device and Method are provide for determining the thickness of a layer of solid ice, a mixture of ice and water, or a mixture of ice arid other liquid, accumulated on the outer surface of an object. First and second total impedance sensors are operated at first and second frequencies. Corresponding first and second AC total impedance measuring circuits are coupled to The first and second sensors to produce output voltages based on the total impedance changes sensed by the sensors. A processor is coupled to the first and second measuring circuits to generate an output value using the measured output voltages. The output value s indicative of the thickness of the ice or ice and water mixture, or ice and other liquid.

Official Gazette of the U.S. Patent and Trademark Office

Alternating Current; Ice; Thickness; Depth Measurement

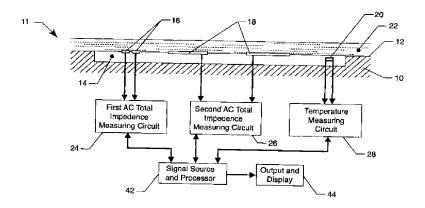

36 LASERS AND MASERS

Includes parametric amplifiers. For related information see also 76 Solid-State Physics.

20010125635 NASA Langley Research Center, Hampton, VA USA

Method of Controlling Lasing Wavelength(s)


Barnes, Norman P., Inventor, NASA Langley Research Center, USA; Murray, Keith E., Inventor, NASA Langley Research Center, USA; Hutcheson, Ralph L., Inventor, NASA Langley Research Center, USA; Oct. 31, 2000; 9p; In English

Patent Info.: Filed 13 May 1998; NASA-Case-LAR-15564-1-SB; US-Patent-6,141,368; US-Patent-Appl-SN-078410; No Copyright; Avail; CASI; A02, Hardcopy; A01, Microfiche

A method is provided to control the lasing wavelength of a laser material without changing or adjusting the mechanical components of a laser device, The rate at which the laser material is pumped with the pumping energy is controlled so that lasing occurs at one or more lasing wavelengths based on the rate. The lasing wavelengths are determined by transition lifetimes and/or energy transfer rates.

Official Gazette of the U.S. Patent and Trademark Office

Lasing; Laser Materials; Wavelengths

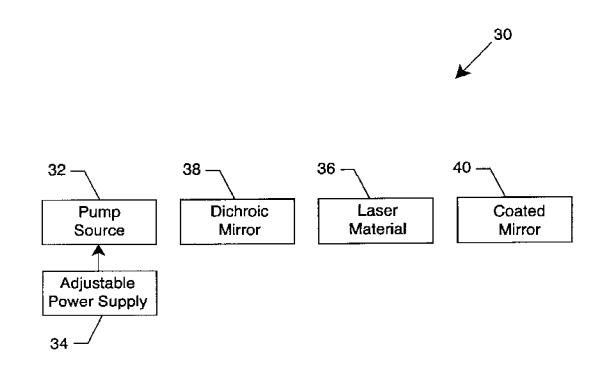

37
MECHANICAL ENGINEERING

Includes auxiliary systems (nonpower); machine elements and processes; and mechanical equipment.

20010094775 NASA Johnson Space Center, Houston, TX USA


Method for Providing a Jewel Bearing for Supporting a Pump Rotor Shaft

Aber, Gregory S., Inventor, NASA Johnson Space Center, USA; Jul. 03, 2001; 22p; In English; Division of US-Patent-Appl-SN-644579, filed 10 May 1996

Patent Info.: Filed 9 Jul. 1999; NASA-Case-MSC-22721-2; US-Patent-6,254,359; US-Patent-Appl-SN-354915; US-Patent-Appl-SN-644579; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

Methods for a blood pump bearing system within a pump housing to support long-term high-speed rotation of a rotor with an impeller blade having a plurality of individual magnets disposed thereon to provide a small radial air gap between the magnets and a stator of less than 0.025 inches. The bearing system may be mounted within a flow straightener, diffuser, or other pump element to support the shaft of a pump rotor. The bearing system includes a zirconia shaft having a radiused end. The radiused end has a first radius selected to be about three times greater than the radius of the zirconia shaft. The radiused end of the zirconia shaft engages a flat sapphire endstone. Due to the relative hardness of these materials a flat is quickly produced during break-in on the zirconia radiused end of precisely the size necessary to support thrust loads whereupon wear substantially ceases. Due to the selection of the first radius, the change in shaft end-play during pump break-in is limited to a total desired end-play of less than about 0.010 inches. Radial loads are supported by an olive hole ring jewel that makes near line contact around the circumference of the shaft to support high speed rotation with little friction. The width of olive hole ring jewel is small to allow heat to conduct through to thereby prevent heat build-up in the bearing. A void defined by the bearing elements may fill with blood that then coagulates within the void. The coagulated blood is then conformed to the shape of the bearing surfaces. Author

Blood Pumps; Rotor Blades (Turbomachinery); Rotors; Sapphire; Shafts (Machine Elements); Zirconium Oxides; Bearings

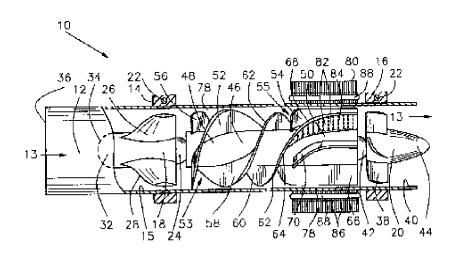

20010095543 NASA Johnson Space Center, Houston, TX USA

Solar-Powered Refrigeration System

Ewert, Michael K., Inventor, NASA Johnson Space Center, USA; Bergeron, David J., III, Inventor, NASA Johnson Space Center, USA; Jul. 03, 2001; 6p; In English


Patent Info.: Filed 3 Jun. 1999; MSC-22970-1; US-Patent-6,253,563; US-Patent-Appl-SN-337208; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

A solar powered vapor compression refrigeration system is made practicable with thermal storage and novel control techniques. In one embodiment, the refrigeration system includes a photovoltaic panel, a variable speed compressor, an insulated enclosure, and a thermal reservoir. The photovoltaic (PV) panel converts sunlight into DC (direct current) electrical power. The DC electrical power drives a compressor that circulates refrigerant through a vapor compression refrigeration loop to extract heat from the insulated enclosure. The thermal reservoir is situated inside the insulated enclosure and includes a phase change material. As heat is extracted from the insulated enclosure, the phase change material is frozen, and thereafter is able to act as a heat sink to maintain the temperature of the insulated enclosure in the absence of sunlight. The conversion of solar power into stored thermal energy is optimized by a compressor control method that effectively maximizes the compressor's USAge of available energy. A capacitor is provided to smooth the power voltage and to provide additional current during compressor start-up. A controller monitors the rate of change of the smoothed power voltage to determine if the compressor is operating below or above the available

power maximum, and adjusts the compressor speed accordingly. In this manner, the compressor operation is adjusted to convert substantially all available solar power into stored thermal energy.

Official Gazette of the U.S. Patent and Trademark Office

Sunlight; Photovoltaic Cells; Photovoltaic Conversion; Refrigerators

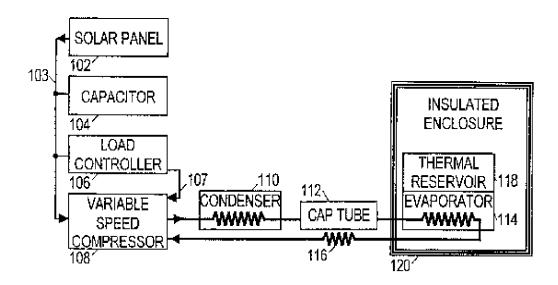

20010111032 NASA Pasadena Office, CA USA

Sealing Assembly for Sealing a Port and the Like

Haas, Jon W., Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Haupt, Charles W., Inventor, Jet Propulsion Lab., California Inst. of Tech., USA; Oct. 10, 2000; 6p; In English


Patent Info.: Filed 27 Apr. 1999; NASA-Case-NPO-30307-1T; US-Patent-6,129,359; US-Patent-Appl-SN-300561; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

The sealing assembly for a port of a valve or the like is disclosed. In detail, the sealing assembly includes the port having a circular shaped end with a circular shaped knife-edge thereon. The sealing assembly further includes a hollow cap having a closed first end with an aperture therethrough and an open second end. The cap further includes internal threads adapted to mate with the external threads of the port. A gasket is mounted within the cap having flat first and second principle sides and made of a deformable metal, the first principle side of the gasket for mounting against the circular shaped knife edge of the port. A plunger having a circular shaped disc portion is adapted to fit within the hollow cap and is engagable with the first principle surface of the gasket and includes a shaft portion extending out of the aperture. The cap and shaft of the plunger include external wrenching flats. Thus when the cap is screwed onto the port and the plunger is prevented from rotating by a wrench mounted on the wrenching

flats of the shaft portion of the plunger, the gasket is forced into engagement with the knife edge in pure compression and no rotation of the gasket occurs causing the knife edge to locally deform the gasket sealing of the port.

Official Gazette of the U.S. Patent and Trademark Office

Sealing; Ports (Openings)

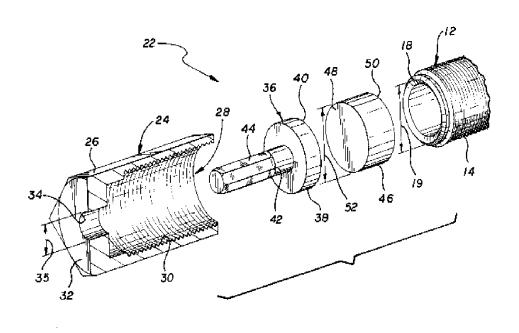

200101111096 NASA Glenn Research Center, Cleveland, OH USA

Assembly For Moving a Robotic Device Along Selected Axes

Nowlin, Brentley Craig, Inventor, NASA Glenn Research Center, USA; Koch, Lisa Danielle, Inventor, NASA Glenn Research Center, USA; Oct. 23, 2001; 16p; In English


Patent Info.: Filed 9 Jun. 2000; NASA-Case-LEW-16690-1; US-Patent-6,308,113; US-patent-Appl-SN-606103; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

An assembly for moving a robotic device along selected axes includes a programmable logic controller (PLC) for controlling movement of the device along selected axes to effect movement of the device to a selected disposition. The PLC includes a plurality of single axis motion control modules, and a central processing unit (CPU) in communication with the motion control modules. A human-machine interface is provided for operator selection of configurations of device movements and is in

communication with the CPU. A motor drive is in communication with each of the motion control modules and is operable to effect movement of the device along the selected axes to obtain movement of the device to the selected disposition.

Official Gazette of the U.S. Patent and Trademark Office

Robotics; Robot Control; Controllers; Command and Control; Man Machine Systems

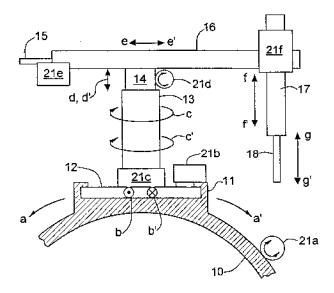


20010125606 NASA Marshall Space Flight Center, Huntsville, AL USA

Apparatus and Method for Generating Thrust Using a Two Dimensional, Asymmetrical Capacitor Module Campbell, Jonathan W., Inventor, NASA Marshall Space Flight Center, USA; Nov. 13, 2001; 7p; In English Patent Info.: Filed 8 Mar. 2000; NASA-Case-MFS-31419-1; US-Patent-6,317,310; US-Patent-Appl-SN-520817; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

A capacitor module system is provided for creating a thrust force. The system includes a capacitor module provided with a first conductive element having a cylindrical geometry. The first conductive element can be a hollow cylinder or a solid cylinder. The capacitor module also includes a second conductive element axially spaced from the first conductive element and of smaller axial extent. The second conductive element can be a flat disk, a dome, or a conductive tip at the end of a dielectric rod. A dielectric element is disposed between the first conductive element and the second conductive element. The system also includes a high voltage source having first and second terminals connected respectively to the first and second conductive elements. The high voltage source applies a high voltage to the conductive elements of sufficient value to create a thrust force on the module inducing movement thereof.

Official Gazette of the U.S. Patent and Trademark Office

Asymmetry; Thrust; Cylindrical Bodies



20010125615 NASA Marshall Space Flight Center, Huntsville, AL USA

Orbital Friction Stir Weld System


Ding, R. Jeffrey, Inventor, NASA Marshall Space Flight Center, USA; Carter, Robert W., Inventor, NASA Marshall Space Flight Center, USA; Jul. 10, 2001; 10p; In English

Patent Info.: Filed 18 Dec. 1998; NASA-Case-MFS-31269-1; US-Patent-6,269,052; US-Patent-Appl-SN-216484; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

This invention is an apparatus for joining the ends of two cylindrical (i.e., pipe-shaped) sections together with a friction stir weld. The apparatus holds the two cylindrical sections together and provides back-side weld support as it makes a friction stir weld around the circumference of the joined ends.

Official Gazette of the U.S. Patent and Trademark Office

Cylindrical Bodies; Friction; Welding Machines

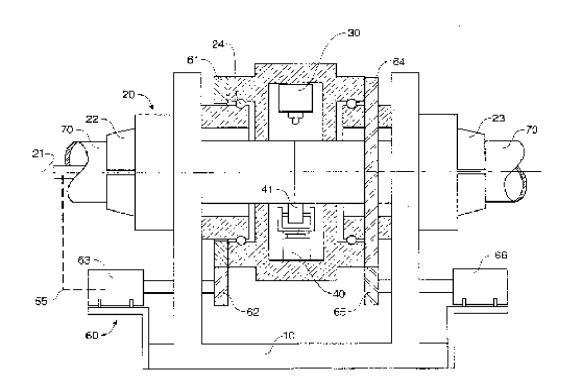

20010125618 NASA Marshall Space Flight Center, Huntsville, AL USA


Resealable Roller Clutch

Myers, W. Neill, Inventor, NASA Marshall Space Flight Center, USA; Oct. 24, 2000; 10p; In English

Patent Info.: Filed 9 Dec. 1998; NASA-Case-MFS-31258; US-Patent-6,135,255; US-Patent-Appl-SN-207710; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

A clutch that connects a first rotating member to a second rotating member in a manner that allows directional rotation between the two members in an engaged mode and free rotation between the members in a disengaged mode. The novelty of this invention ties in the combination of directional rotation (i.e., rotation in one direction) capability with free rotation (i.e., rotation in both directions) capability in a single device.

Official Gazette of the U.S. Patent and Trademark Office *Clutches*; *Rollers*

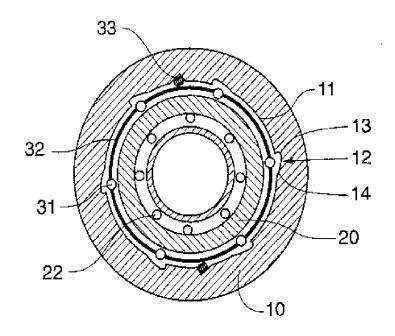

20010125629 NASA Marshall Space Flight Center, Huntsville, AL USA

Friction Stir Weld System for Welding and Weld Repair


Ding, R. Jeffrey, Inventor, NASA Marshall Space Flight Center, USA; Romine, Peter L., Inventor, NASA Marshall Space Flight Center, USA; Oelgoetz, Peter A., Inventor, NASA Marshall Space Flight Center, USA; Jan. 16, 2001; 6p; In English; Provisional application of US-Patent-Appl-SN-111418, filed 8 Dec. 1998

Patent Info.: Filed 8 Dec. 1999; NASA-Case-MFS-30125-1; US-Patent-6,173,880; US-Patent-Appl-SN-459388; US-Patent-Appl-SN-111418; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

A friction stir weld system for welding and weld repair has a base foundation unit connected to a hydraulically controlled elevation platform and a hydraulically adjustable pin tool. The base foundation unit may be fixably connected to a horizontal surface or may be connected to a mobile support in order to provide mobility to the friction stir welding system. The elevation

platform may be utilized to raise and lower the adjustable pin tool about a particular axis. Additional components which may be necessary for the friction stir welding process include back plate tooling, fixturing and/or a roller mechanism. Author

Friction Welding; Hydraulic Control

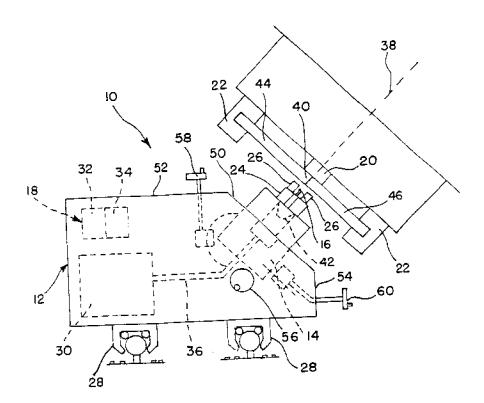

43 EARTH RESOURCES AND REMOTE SENSING

Includes remote sensing of earth resources by aircraft and spacecraft; photogrammetry; and aerial photography. For instrumentation see 35 Instrumentation and Photography.

20010111076 NASA Langley Research Center, Hampton, VA USA Interfaces For Planning Vehicle Routes


Feyereisen ,Thea Lynn, Inventor, NASA Langley Research Center, USA; Misiak, Christopher J., Inventor, NASA Langley Research Center, USA; Riley, Victor A., Inventor, NASA Langley Research Center, USA; Sep. 11, 2001; 9p; In English Patent Info.: Filed 7 Oct. 1999; NASA-Case-LAR-15970-1; US-Patent-6,289,277; US-Patent-Appl-SN-413959; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

A system for producing vehicle routes such as aircraft flight plans in the presence of weather and other hazards defines static and moving hazards with polygons drawn on a display containing graphic hazard regions. Different hazard types and intensities

are displayed differently. Both lateral and vertical geographic depictions are displayed, and hazards can be displayed temporally as well. Users input information and thresholds for hazards.

Official Gazette of the U.S. Patent and Trademark Office

Routes; Hazards; Flight Plans; Weather; Flight Conditions; Computer Systems Design

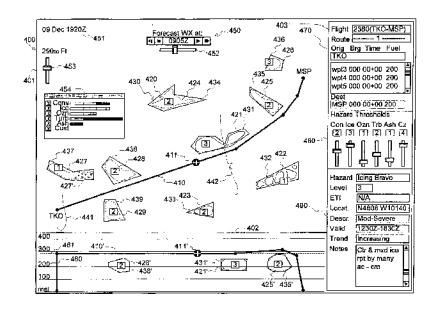

52 AEROSPACE MEDICINE

Includes physiological factors; biological effects of radiation; and effects of weightlessness on man and animals.

20010094778 NASA Johnson Space Center, Houston, TX USA

Urine Preservative

Smith, Scott M., Inventor, NASA Johnson Space Center, USA; Nillen, Jeannie, Inventor, NASA Johnson Space Center, USA; Jul. 17, 2001; 4p; In English

Patent Info.: Filed 17 Dec. 1998; NASA-Case-MSC-22695-1; US-Patent-6,261,844; US-Patent-Appl-SN-213988; No Copyright; Avail: CASI; A01, Hardcopy; A01, Microfiche

Disclosed is CPG, a combination of a chlorhexidine salt (such as chlorhexidine digluconate, chlorhexidine diacetate, or chlorhexidine dichloride) and n-propyl gallate that can be used at ambient temperatures as a urine preservative.

Author

Preservatives; Urine

60 COMPUTER OPERATIONS AND HARDWARE

Includes hardware for computer graphics, firmware, and data processing. For components see 33 Electronics and Electrical Engineering.

20010096183 NASA Stennis Space Center, Bay Saint Louis, MS USA

Apparatus and Method for Effecting Data Transfer Between Data Systems

Kirkpatrick, Joey V., Inventor, NASA Stennis Space Center, USA; Grosz, Francis B., Jr., Inventor, NASA Stennis Space Center,


USA; Lannes, Kenny, Inventor, NASA Stennis Space Center, USA; Maniscalco, David G., Inventor, NASA Stennis Space Center, USA; Sep. 11, 2001; 16p; In English

Patent Info.: Filed 25 Mar. 1998; NASA-Case-SSC-00052; US-Patent-6,288,813; US-Patent-Appl-SN-047788; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

An apparatus for effecting data transfer between data systems comprising a first transceiver and a second transceiver. The first transceiver has an input for receiving digital data from one of the data systems, an output for serially outputting digital data to one of the data systems, at least one transmitter for converting digital data received at the input into optical signals, and at least one receiver for receiving optical signals and serially converting the received optical signals to digital data for output to the data output. The second transceiver has an input for receiving digital data from another one of the data systems, an output for serially outputting digital data to the another one of the data systems, at least one transmitter for serially converting digital data received at the input of the second transceiver into optical signals, and at least one receiver for receiving optical signals and serially converting the received optical signals to digital data for output to the output of the second transceiver. The apparatus further comprises an optical link connecting the first and second transceivers. The optical link comprising a pair of optical fibers. One of the optical fibers optically links the transmitter of the first transceiver to the receiver of the second transceiver. The other optical fiber optically links the receiver of the first transceiver to the transmitter of the second transceiver.

Official Gazette of the U.S. Patent and Trademark Office

Data Systems; Digital Data; Transmitter Receivers; Data Transfer (Computers)

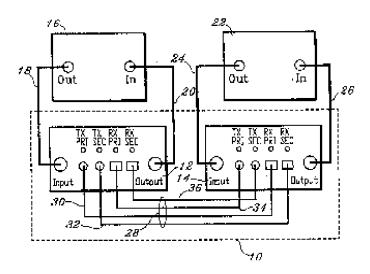

63 CYBERNETICS

Includes feedback and control theory, artificial intelligence, robotics and expert systems. For related information see also 54 Man/System Technology and Life Support., Artificial Intelligence and Robotics

20010096119 NASA Johnson Space Center, Houston, TX USA

Compact Dexterous Robotic Hand

Lovchik, Christopher Scott, Inventor, NASA Johnson Space Center, USA; Diftler, Myron A., Inventor, NASA Johnson Space Center, USA; Jun. 12, 2001; 28p; In English


Patent Info.: Filed 25 Jan. 1999; NASA-Case-MSC-22883-1; US-Patent-6,244,644; US-Patent-Appl-SN-236965; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

A compact robotic hand includes a palm housing, a wrist section, and a forearm section. The palm housing supports a plurality of fingers and one or more movable palm members that cooperate with the fingers to grasp and/or release an object. Each flexible finger comprises a plurality of hingedly connected segments, including a proximal segment pivotally connected to the palm housing. The proximal finger segment includes at least one groove defining first and second cam surfaces for engagement with a cable. A plurality of lead screw assemblies each carried by the palm housing are supplied with power from a flexible shaft rotated

by an actuator and output linear motion to a cable move a finger. The cable is secured within a respective groove and enables each finger to move between an opened and closed position. A decoupling assembly pivotally connected to a proximal finger segment enables a cable connected thereto to control movement of an intermediate and distal finger segment independent of movement of the proximal finger segment. The dexterous robotic hand closely resembles the function of a human hand yet is light weight and capable of grasping both heavy and light objects with a high degree of precision.

Official Gazette of the U.S. Patent and Trademark Office

Robot Arms; Robotics; Manipulators

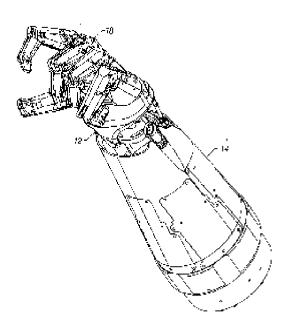

64 NUMERICAL ANALYSIS

Includes iteration, difference equations, and numerical approximation.

20010095542 NASA Dryden Flight Research Center, Edwards, CA USA

Stable Algorithm For Estimating Airdata From Flush Surface Pressure Measurements

Whitmore, Stephen, A., Inventor, NASA Dryden Flight Research Center, USA; Cobleigh, Brent R., Inventor, NASA Dryden Flight Research Center, USA; Haering, Edward A., Jr., Inventor, NASA Dryden Flight Research Center, USA; Jun. 26, 2001; 22p; In English


Patent Info.: Filed 5 Oct. 1998; NASA-Case-DRC-98022; US-Patent-6,253,166; US-Patent-Appl-SN-173608; No Copyright; Avail: CASI; A03, Hardcopy; A01, Microfiche

An airdata estimation and evaluation system and method, including a stable algorithm for estimating airdata from nonintrusive surface pressure measurements. The airdata estimation and evaluation system is preferably implemented in a flush airdata sensing (FADS) system. The system and method of the present invention take a flow model equation and transform it into a triples formulation equation. The triples formulation equation eliminates the pressure related states from the flow model equation

by strategically taking the differences of three surface pressures, known as triples. This triples formulation equation is then used to accurately estimate and compute vital airdata from nonintrusive surface pressure measurements.

Official Gazette of the U.S. Patent and Trademark Office

Algorithms; Pressure Measurement; Flow Measurement

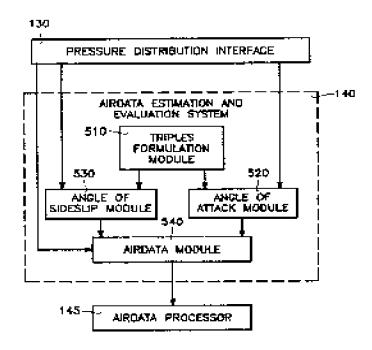

74 OPTICS

Includes light phenomena; and optical devices. For lasers see 36 Lasers and Masers.

20010110767 NASA Goddard Space Flight Center, Greenbelt, MD USA Shaft Position Optical Sensor


Blumenstock, Kenneth A., Inventor, NASA Goddard Space Flight Center, USA; Hakum, Claef F., Inventor, NASA Goddard Space Flight Center, USA; Johnson, Clarence S., Inventor, NASA Goddard Space Flight Center, USA; Jan. 23, 2001; 10p; In English; Provisional application of US-Patent-Appl-SN-097083, filed 19 Aug. 1998

Patent Info.: Filed 19 Aug. 1999; NASA-Case-GSC-13988-3; US-Patent-6,177,997; US-Patent-Appl-SN-376000; US-Patent-Appl-SN-097083; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

The present invention is an optical sensor that senses the movement of a shaft. Detection of radial movement is made when a portion of light incident on the shaft sensor-target is blocked. For detection of axial movement, a disk with flat surface is mounted and used to block a portion of light. The variation in the amount of light allowed to pass through is a measure of the position of the shaft. As proposed by this invention, significant improvement is made with respect to sensitivity and linearity of the system

when the light is permanently partially blocked, to accomplish this goal this invention adds a boss to the system, to eliminate possible drift of system performance due to LED degradation or temperature variation, a feedback feature is added to the system. Official Gazette of the U.S. Patent and Trademark Office

Optical Measuring Instruments; Shafts (Machine Elements); Detection

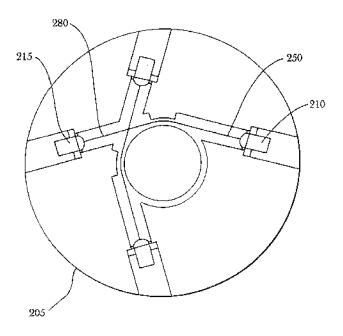


20010110770 NASA Goddard Space Flight Center, Greenbelt, MD USA Adhesive Bubble Removal Method and Apparatus for Fiber Optic Applications Kolasinski, John R., Inventor, NASA Goddard Space Flight Center, USA; Sep. 11, 2001; 8p; In English Patent Info.: Filed 13 Dec. 1999; NASA-Case-GSC-13874-1; US-Patent-6,287,404; US-Patent-Appl-SN-459473; No Copyright; Avail: CASI; A02, Hardcopy; A01, Microfiche

An assembly for supporting a fiber optic termination or connector in a centrifuge and comprising a cylindrical body member having a top portion adapted to receive the ferrule body portion of a fiber optic termination or connector and a bottom portion for receiving a cylindrical piston/sealing unit is presented. The piston portion of the piston/sealing unit includes a compressible tip which is adapted to a butt up against the outer end of the ferrule body portion of the fiber optic termination or connector. A cylindrical end cap fits over the upper end of the body member for holding the fiber optic termination in place on the body member and causing a seal to be formed between the termination or connector and the upper portion of the body member adjacent the

compressible tip of the plunger. The parts, when fitted together, are placed in a centrifuge which is operated for a predetermined spin cycle, so as to cause any bubbles in the uncured liquid adhesive to be vented outwardly from the termination through the end cap. Subsequent removal of the fiber optic termination or connector from the centrifuge and assembly is "bubble free" and ready to be joined with an optical fiber which is inserted in the ferrule end of the termination or connector.

Official Gazette of the U.S. Patent and Trademark Office

Adhesives; Fiber Optics; Bubbles; Centrifuges

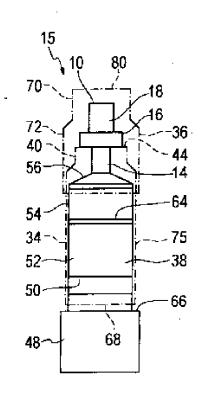

82 DOCUMENTATION AND INFORMATION SCIENCE

Includes information management; information storage and retrieval technology; technical writing; graphic arts; and micrography. For computer documentation see 61 Computer Programming and Software.

20010110773 NASA Ames Research Center, Moffett Field, CA USA

Real-Time Surface Traffic Adviser


Glass, Brian J., Inventor, NASA Ames Research Center, USA; Spirkovska, Liljana, Inventor, NASA Ames Research Center, USA; McDermott, William J., Inventor, NASA Ames Research Center, USA; Reisman, Ronald J., Inventor, NASA Ames Research Center, USA; Gibson, James, Inventor, NASA Ames Research Center, USA; Iverson, David L., Inventor, NASA Ames Research Center, USA; Aug. 21, 2001; 60p; In English; Continuation-in-part of US-Patent-Appl-SN-090812, filed 4 Jun. 1998 Patent Info.: Filed 10 Aug. 1998; NASA-Case-ARC-14268-2; US-Patent-6,278,965; US-Patent-Appl-SN-131560; US-Patent-Appl-SN-090812; No Copyright; Avail: CASI; A04, Hardcopy; A01, Microfiche

A real-time data management system which uses data generated at different rates by multiple heterogeneous incompatible data sources are presented. In one embodiment, the invention is as an airport surface traffic data management system (traffic adviser) that electronically interconnects air traffic control, airline, and airport operations user communities to facilitate information sharing and improve taxi queuing. The system uses an expert system to fuse dam from a variety of airline, airport

operations, ramp control, and air traffic control sources, in order to establish, predict, and update reference data values for every aircraft surface operation.

Official Gazette of the U.S. Patent and Trademark Office

Real Time Operation; Air Traffic Control; Data Management; Airports

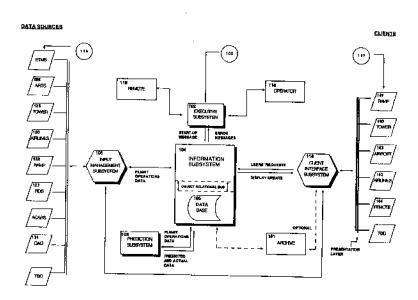

Subject Term Index

ABRASION RESISTANCE, 12 ACCELERATION (PHYSICS), 6 ACTUATORS, 12 ADHESIVES, 42 AEROSPACE VEHICLES, 12 AIR TRAFFIC CONTROL, 43 AIRPORTS, 8, 43 ALGORITHMS, 40 ALTERNATING CURRENT, 28 **ALUMINUM OXIDES, 26** ANHYDRIDES, 10, 13 ANNULI, 9 ANTENNA ARRAYS, 24 ANTENNA DESIGN, 16 ASYMMETRY, 33 ATTITUDE (INCLINATION), 2

В

BASE FLOW, 1 BEARINGS, 30 BENZENE, 13 BLOOD PUMPS, 30 BROADBAND, 16 BUBBLES, 42 BYPASSES, 19, 23

C

CATHETERIZATION, 17 CENTRIFUGES, 42 CHEMICAL STERILIZATION, 20 CHIPS (ELECTRONICS), 22 CIRCUITS, 19, 23 CLUTCHES, 35 COMBUSTION CHAMBERS, 14 COMMAND AND CONTROL, 33 COMMUNICATION EQUIPMENT, 15 COMPOSITE STRUCTURES, 13 COMPUTER SYSTEMS DESIGN, 37 CONTROL, 3 CONTROLLERS, 33 COPOLYMERS, 13 CORROSION, 11 CRYOGENIC TEMPERATURE, 28 CYLINDRICAL BODIES, 33, 34

D

DATA FLOW ANALYSIS, 21, 22
DATA MANAGEMENT, 43
DATA SYSTEMS, 38
DATA TRANSFER (COMPUTERS), 38
DECOMPOSITION, 4, 14
DEMODULATION, 21
DEPTH MEASUREMENT, 28
DETECTION, 18, 28, 41
DIAMINES, 10, 13
DICARBOXYLIC ACIDS, 10, 13
DIGITAL DATA, 38
DISPLAY DEVICES, 8
DIVIDERS, 24
DRAG REDUCTION, 1

Ε

ELASTOMERS, 20
ELECTRIC BATTERIES, 19, 23
ELECTRIC CHARGE, 19, 23
ELECTRIC DISCHARGES, 18
ELECTRIC POTENTIAL, 19, 23
ELECTROCHEMISTRY, 11
ELECTRODES, 18
ELECTROMAGNETIC RADIATION, 24

F

FABRICATION, 18
FEEDERS, 24
FERROELECTRICITY, 16
FIBER OPTICS, 42
FLIGHT CONDITIONS, 37
FLIGHT PLANS, 37
FLOW MEASUREMENT, 40
FOSSIL FUELS, 6
FREQUENCIES, 15
FRICTION, 34
FRICTION WELDING, 36
FUEL SYSTEMS, 4
FULLERENES, 20

G

GAS ANALYSIS, 18 GAS GENERATORS, 9 GAS-METAL INTERACTIONS, 11 GASES, 11 GLOBAL POSITIONING SYSTEM, 2, 5, 7 GLOVES, 20

Н

HAZARDS, 37
HEAT SINKS, 26
HIGH PRESSURE, 28
HIGH TEMPERATURE, 26
HOLLOW CATHODES, 20
HYDRAULIC CONTROL, 36
HYDROCARBONS, 18
HYDROGEN, 18

1

ICE, 28 IGNITION, 9, 14 INVENTIONS, 18

L

LASER MATERIALS, 29 LASING, 29 LIQUID OXYGEN, 10 LOW EARTH ORBITS, 7

M

MAN MACHINE SYSTEMS, 33 MANIPULATORS, 39 MANUFACTURING, 18 MASS FLOW RATE, 26 MECHANICAL DEVICES, 1 MEDICAL EQUIPMENT, 17 METAL SURFACES, 20 METHODOLOGY, 21 MICROELECTROMECHANICAL SYS-TEMS, 20 MICROPROCESSORS, 5 MICROSTRIP ANTENNAS, 24 MICROWAVE ANTENNAS, 17 MICROWAVE TRANSMISSION, 16 MICROWAVES, 3 MILLIMETER WAVES, 16 MINIATURE ELECTRONIC EQUIP-MENT, 16

MINIATURIZATION, 25 MONITORS, 8

N

NAVIGATION SATELLITES, 2, 7 NICKEL HYDROGEN BATTERIES, 18 NONINTRUSIVE MEASUREMENT. 26

0

OPTICAL MEASURING INSTRUMENTS, 41 ORGANIC CHEMISTRY, 10, 13

P

PACKAGING, 20 PATCH ANTENNAS, 16, 24 PHOTOVOLTAIC CELLS, 31 PHOTOVOLTAIC CONVERSION, 31 PIEZOELECTRICITY, 15 POLYIMIDES, 10, 12, 13 POLYMERIC FILMS, 12 POLYMERIZATION, 10, 13 POROSITY, 1 PORTABLE EQUIPMENT, 16 PORTS (OPENINGS), 32 POSITION (LOCATION), 3 PREAMPLIFIERS, 5 PRESERVATIVES, 37 PRESSURE MEASUREMENT, 25, 26, PRESSURE SENSORS, 25, 26, 28 PRODUCTION ENGINEERING, 13 PROPELLANT COMBUSTION, 4, 14 PROPELLANT CONSUMPTION, 4, 14 PROPULSION SYSTEM CONFIGU-RATIONS, 4 PROSTATE GLAND, 17 PROTOTYPES, 11

R

RADIO FREQUENCIES, 24
REACTION KINETICS, 14
REAL TIME OPERATION, 11, 43
RECEIVERS, 2, 3
REFLECTANCE, 12
REFLECTOR ANTENNAS, 16
REFRIGERATORS, 31
REMOTE CONTROL, 12
ROBOT ARMS, 39
ROBOT CONTROL, 33

ROBOTICS, 33, 39
ROCKET OXIDIZERS, 4
ROCKET PROPELLANTS, 6
ROLLERS, 35
ROTOR BLADES (TURBOMACHINERY), 30
ROTORS, 30
ROUTES, 37

WEATHER, 37 WELDING MACHINES, 34 WIND DIRECTION, 8 WIND VELOCITY, 8

Ζ

ZIRCONIUM OXIDES, 30

S

SAPPHIRE, 30 SATELLITE TRACKING, 7, 16 SCHOTTKY DIODES, 18 SEALING, 32 SEMICONDUCTORS (MATERIALS), SHAFTS (MACHINE ELEMENTS), 27, 30, 41 SHAPE MEMORY ALLOYS, 12 SIGNAL TRANSMISSION, 15 SILICON CARBIDES, 18 SPACECRAFT PROPULSION, 4 SPEED INDICATORS, 27 STRAIN GAGES, 26 SUBASSEMBLIES, 20 SUNLIGHT, 31 SURFACE VEHICLES, 6

Т

TANKS (CONTAINERS), 10
TELEMETRY, 5, 22
TEMPERATURE COMPENSATION, 26
THERMAL STABILITY, 10, 12, 13
THICKNESS, 28
THRUST, 33
TISSUES (BIOLOGY), 17
TOXICITY, 4, 14
TRANSMITTER RECEIVERS, 38
TUBE CATHODES, 20
TUNING, 16
TURBINE PUMPS, 9

U

ULTRASONIC AGITATION, 20 URINE, 37

W

WAFERS, 15 WATER VAPOR, 11 WAVELENGTHS, 29

Personal Author Index

A

Aber, Gregory S., 29 Arndt, Dickey G., 17 Arndt, G. Dickey, 2

В

Balein, Rizza, 14
Barnes, Norman P., 29
Bauer, Steve X. S., 1
Baumbick, Robert J., 11
Bergeron, David J., III, 30
Blumenstock, Kenneth A., 40
Britton, Doris L., 17
Brown, Gerald E., 7

C

Campbell, Jonathan W., 33
Caplan, Maggie L., 12
Carl, James R., 2, 17
Carter, Robert W., 34
Chapman, John J., 25, 27
Cobleigh, Brent R., 39
Craig, Calvin L., Jr., 22
Curto, Paul A., 7

D

Daugherty, Robert H., 14 Davis, Dennis D., 11 DeLay, Thomas K., 9 Denhardt, Gerald A., 14 Dennis, Henry J., Jr., 8 Densmore, Arthur C., 15 Diftler, Myron A., 38 Ding, R. Jeffrey, 34, 35 Dougherty, Lamar F., 6 Dowling, Jason T., 21

Ε

Eby, Ronald K., 12 Evers, Jeffrey, 19, 22 Ewert, Michael K., 30

F

Feyereisen ,Thea Lynn, 36 Fink, Patrick W., 23 Fox, Robert L., 14 Frimer, Aryeh A., 13

G

Gelger, Ronald V., 19 Gibson, James, 42 Glass, Brian J., 42 Gray, Andrew A., 21 Grebowsky, Gerald J., 21 Grosz, Francis B., Jr., 37

H

Haas, Jon W., 31
Haering, Edward A., Jr., 39
Hakum, Claef F., 40
Haupt, Charles W., 31
Hellbaum, Richard F., 14
Hissam, D. Andy, 8
Holloway, Nancy M., 25
Hopson, Purnell, Jr., 25
Howard, David E., 27
Hunter, Gary William, 18
Hutcheson, Ralph L., 29

ı

Iverson, David L., 42

J

Jamnejad, Vahraz, 15 Jang, SeGon, 14 Jensen, Brian J., 13 Johnson, Clarence S., 40

K

Kirkpatrick, Joey V., 37 Koch, Lisa Danielle, 32 Kolasinski, John R., 41

L

Lannes, Kenny, 38 Little, Bruce D., 14 Lovchik, Christopher Scott, 38

М

Maniscalco, David G., 38 McDermott, William J., 42 Meador, Mary Ann B., 10, 13 Meador, Michael A., 12 Misiak, Christopher J., 36 Mumaw, Susan J., 22 Murray, Keith E., 29 Myers, W. Neill, 8, 34

Ν

Ngo, Phong, 17 Nguyen, Baochan N., 12 Niles, Frederick A., 1, 6 Nillen, Jeannie, 37 Nowlin, Brentley Craig, 32

0

Oelgoetz, Peter A., 35 Olivas, John D., 20

P

Patterson, Michael J., 19 Piazza, Anthony, 25 Powers, William T., 27

R

Raffoul, George W., 17 Reisman, Ronald J., 42 Riley, Victor A., 36 Robertson, Glen A., 5 Romanofsky, Robert R., 16 Romine, Peter L., 35

S

Schneider, Steven J., 3, 13 Scholz, Raymond C., 14 Shams. Qamar A., 27 Sims, William Herbert, III, 24 Smith, Dennis A., 27 Smith, Scott M., 37 Smith, William C., 26 Soulas, George C., 19 Spirkovska, Liljana, 42 Srinivasan, Meera, 21 St.Clair, Anne, 12

Т

Taylor, Eric S., 8 Thompson, David W., 12

V

Verhey, Timothy R. R., 19

W

Walker, Stuart D., 22 Ward, John L., 4 Weinstein, Leonard M., 28 Wennersten, Miriam D., 6 Whitmore, Stephen, A., 39 Woo, Kenneth E., 15 Wood, Richard M., 1 Woodard, Stanley E., 14

Z

Zysko, Jan A., 7

PUBLIC AVAILABILITY OF COPIES OF PATENTS

Copies of U.S. patents may be purchased directly from the U.S. Patent and Trademark Office, Washington, D.C. 20231 at \$3.00 per copy. When ordering patents, the U.S. Patent Number should be used, and payment must be remitted in advance, preferably by money order or check payable to the Commissioner of Patents and Trademarks. Prepaid purchase coupons for ordering are also available from the Patent and Trademark Office.

LICENSES FOR COMMERCIAL USE: INQUIRIES AND APPLICATIONS FOR LICENSE

NASA inventions, abstracted in this bibliography, are available for nonexclusive or exclusive licensing in accordance the Department of Commerce Patent License Regulations (37 CFR Part 404). It is significant that all licenses for NASA inventions shall be by express written instruments and that no license will be granted or implied in a NASA invention except as provided in the Department of Commerce Patent License Regulations (37 CFR Part 404).

Inquiries concerning the NASA Patent Licensing Program or the availability of licenses for the commercial use of NASA—owned inventions covered by U.S. patents or pending applications for patent should be forwarded to the NASA Patent Counsel of the NASA installation having cognizance of the specific invention, or the Associate General Counsel for Intellectual Property, code GP, National Aeronautics and Space Administration, Washington, D.C. 20546. Inquiries should refer to the NASA Case Number, the Title of the Invention, and the U.S. Patent Number or the U.S. Application Serial Number assigned to the invention as shown in this bibliography.

The NASA Patent Counsel having cognizance of the invention is determined by the first three letters or prefix of the NASA Case Number assigned to the invention. The addresses of NASA Patent Counsels are listed alongside the NASA Case Number prefix letters in the following table.

CENTER PATENT COUNSELS

ARC-xxxxx	ARC/202A-3	Ames Research Center, Mo	offett Field, CA 94035		
	650-604-5104	Robert M. Padilla	rpadilla@mail.arc.nasa.gov		
	650-604-4294	Carla M. Wong	cwong@mail.arc.nasa.gov		
	650-604-0887	Vickie Kent	vkent@mail.arc.nasa.gov		
	650-604-5055	Ken Warsh (OCC)	kwarsh@mail.arc.nasa.gov		
	650-604-7486	FAX	CTO: Carolina Blake 650-604-0893		
LEW-xxxxx	GRC/500-118		Lewis Field, 21000 Brookpark Rd,		
		Cleveland, OH 44135-3191			
	216-433-8855	Kent N. Stone	kent.n.stone@grc.nasa.gov		
	216-433-5756	Holly J. Augustin	holly.j.agustin@grc.nasa.gov		
	216-433-8878	Alvie N. McKnight	a.n.mcknight@grc.nasa.gov		
	216-433-6790	FAX	CTO: Larry Viterna 216-433-3484		
GSC-xxxxx	GSFC/750.2		ter, Greenbelt, MD 20771-0001		
	301-286-7351	Guy M. Miller	guy.m.miller.1@gsfc.nasa.gov		
	301-286-9279	Keith L. Dixon	keith.l.dixon.1@gsfc.nasa.gov		
	301-286-6521	Michael J. Gonet	michael.j.gonet.1@gsfc.nasa.gov		
	301-286-2358	Chan K. Park	chan.k.park.1@gsfc.nasa.gov		
	301-286-7351	Milelene Gunyon	milelene.gunyon.1@gsfc.nasa.gov		
	301-286-9502	FAX	CTO: Gary Martin 301-286-8878		
MSC-xxxxx	JSC/HA	Lyndon B. Johnson Space TX 77058-8452	ohnson Space Center, 2101 NASA Road 1, Houston,		
	281-483-4871	Ed K. Fein	edward.k.fein@jsc.nasa.gov		
	281-483-1003	Hardie R. Barr	hardie.r.barr@jsc.nasa.gov		
	281-483-1001	Jim M. Cate	james.m.cate@jsc.nasa.gov		
	281-483-1013	Mary E. Dickerson	mary.e.dickerson@jsc.nasa.gov		
	281-483-0837	Tanya S. Bryant	tanya.s.bryant@jsc.nasa.gov		
	281-244-8452	FAX	CTO: Charlene Gilbert 281-483-0474		
KSC-xxxxx	KSC/CC-A		nter, Kennedy Space Center, FL 32899-0001		
	321-867-7214		diana.cox-1@kmail.ksc.nasa.gov		
		Carol Anne Dunn	carol.dunn-1@kmail.ksc.nasa.gov		
	321-867-1817	FAX	CTO: Jim Aliberti 321-867-6224		
LAR-xxxxx	LaRC/212	Langley Research Center, Hampton, VA 23681-2199			
	757-864-3521	Linda B. Blackburn	l.b.blackburn@larc.nasa.gov		
	757-864-3230	Robin W. Edwards	r.w.edwards@larc.nasa.gov		
	757-864-3227	Helen M. Galus	h.m.galus@larc.nasa.gov		
	757-864-2470	Kurt G. Hammerle	k.g.hammerle@larc.nasa.gov		
	757-864-8882	Hillary W. Hawkins	h.t.womack@larc.nasa.gov		
	757-864-3955	Tina L. Dempsey	t.l.dempsey@larc.nasa.gov		
	757-864-9260	Rebecca (Becky) A. Hayes	r.a.hayes@larc.nasa.gov		
	757-864-3226	Elaine C. McMahon	e.c.mcmahon@larc.nasa.gov		
	757-864-3522	Theresa C. Walker	t.c.walker@larc.nasa.gov		
	757-864-2828	Kelly A. Wright	k.a.wright@larc.nasa.gov		
	757-864-2592	Joseph J. Mathis, Jr. (Export	Control) j.j.mathis@larc.nasa.gov		
	757-864-2943	Stuart E. Pendelton (Softwar	, 1		
	757-864-9190	FAX	CTO: Sam Morello 757-864-6005		

MFS-xxxxx	MSFC/LS01	George C. Marshall Space Flight Center, Marshal Space Flight Center,			
	256-544-0013 256-544-6580 256-544-0018 256-544-0014 256-544-0258	Lisa R. Hughes	jerry.l.see lisa.hughe abbie.joh	cgroary@msfc.namann@msfc.nasa.g mson@msfc.nasa.g nson@msfc.nas Sally Little	asa.gov gov
NPO-xxxxx	NMO-JPL/180	0-801 NASA Management (Office-JPL	<u>, 4800 Oak Gr</u>	ove Dr, Pasadena,
	010 0710	<u>CA 91109</u>			
	818-354-7770			smiss@jpl.nasa	
	818-354-2091			mascarenas@j	ol.nasa.gov e 818-354-2577
	818-354-5051	FAX	C10:1	vierie McKenzi	e 818-334-2377
DRC-xxxxx	DFRC/D-4839		<u>ch Center,</u>	PO Box 273, I	Edwards, CA
No assigned Pa	tent Counsel - ser	93523-0273 vices provided by NMO-JPL	CTO:	Yvonne Kellogg	g 661-258-3728
SSC-xxxxx	SSC/CCAO	John C. Stennis Space Cen	iter, Stenni	s Space Center	r, MS 39529-6000
No assigned Patent Counsel - se				Kirk Sharp	228-688-1914
HQN-xxxxx HQ/GP NASA I		NASA Headquarters, 300	E Street SV	W, Washington	, DC 20546-0001
	202-358-2424	John G. (Jack) Mannix	jmannix@	hq.nasa.gov	
	202-358-2038	Gary G. Borda		hq.nasa.gov	
	202-358-2067	√ 1	-	hq.nasa.gov	
	202-358-2065	Alan J. Kennedy	•	@hq.nasa.gov	
	202-358-2066	Sue H. Palk		ı.nasa.gov	
	202-358-2040	3 3	kbayer@hq.nasa.gov		
	202-358-2037	Marja (Marty) Lindholm Ke			
	202-358-2041	Regina K. (Gina) Washingto	n	rwashing@hq	.nasa.gov
	202-358-4341	FAX			

PATENT LICENSING REGULATIONS

NATIONAL AERONAUTICS AND SPACE ADMINITRATION 14 CFR Part 1245

Patents and Other Intellectual Property Rights

AGENCY: National Aeronautics and Space Administration (NASA).

Action: Final rule.

SUMMARY: NASA is amending 14 CFR Part 1245 by removing Subpart 2, "Licensing of NASA Inventions." The Department of Commerce has issued similar regulations which prescribe the terms, conditions, and procedures upon which a federally-owned invention may be licensed. These regulations are codified at 37 CFR Part 404, "Licensing of Government Owned Inventions." NASA began granting licenses in accordance with the Department of Commerce regulations on March 13, 1995. All licenses agreements executed prior to this date will operate under the previous regulations.

EFFECTIVE DATE: March 13, 1995.

FOR FURTHER INFORMATION CONTACT:

John G. Mannix, (202) 358-2424.

List of Subjects in 14 CFR Part 1245

Authority delegations (Government agencies), Inventions and patents. Under the authority, 42 U.S.C. 2473, 14 CFR Part 1245 is amended as follows:

PART 1245 — [AMENDED]

Subpart 2 — [Removed and Reserved]

In 14 CFR Part 1245, Subpart 2 (consisting of SS 1245.200 through 1245.214) is removed and reserved.

Dated: April 24,1995.

Edward A. Frankle,

General Counsel.

[FR Doc. 95 10583 Filed 4-28-95, 8:45 am]

BILLING CODE 7510 01 M

Code of Federal Regulations 37 CFR Part 404

Licensing of Government Owned Inventions

Transfer of custody.

Confidentiality of information.

404.13

404.14

Sec.	
404.1	Scope of part.
404.2	Policy and objective.
404.3	Definitions.
404.4	Authority to grant licenses.
404.5	Restrictions and conditions on all licenses granted under this part.
404.6	Nonexclusive licenses.
404.7	Exclusive and partially exclusive licenses.
404.8	Application for a license.
404.9	Notice to Attorney General.
404.10	Modification and termination of licenses.
404.11	Appeals.
404.12	Protection and administration of invetions.

Sec. 404.1 Scope of part.

This part prescribes the terms, conditions, and procedures upon which a federally owned invention, other than an invention in the custody of the Tennessee Valley Authority, may be licensed. It supersedes the regulations at 41 CFR Subpart 101-4.1. This part does not affect licenses which (a) were in effect prior to July 1, 1981; (b) may exist at the time of the Government's acquisition of title to the invention, including those resulting from the allocation of rights to inventions made under Government research and development contracts; (c) are the result of an authorized exchange of rights in the settlement of patent disputes; or (d) are otherwise authorized by law or treaty.

Sec. 404.2 Policy and objective.

It is the policy and objective of this subpart to use the patent system to promote the utilization of inventions arising from federally supported research or development.

Sec. 404.3 Definitions.

- (a) 'Federally owned invention' means an invention, plant, or design which is covered by a patent, or patent application in the United States, or a patent, patent application, plant variety protection, or other form of protection, in a foreign country, title to which has been assigned to or otherwise vested in the United States Government.
- (b) 'Federal agency' means an executive department, military department, Government corporation, or independent establishment, except the Tennessee Valley Authority, which has custody of a federally owned invention.
- (c) 'Small business firm' means a small business concern as defined in section 2 of Pub. L. 85-536 (15 U.S.C. 632) and implementing regulations of the Administrator of the Small Business Administration.
- (d) 'Practical application' means to manufacture in the case of a composition or product, to practice in the case of a process or method, or to operate in the case of a machine or system; and, in each case, under such conditions as to establish that the invention is being utilized and that its benefits are to the extent permitted by law or Government regulations available to the public on reasonable terms.
- (e) 'United States' means the United States of America, its territories and possessions, the District of Columbia, and the Commonwealth of Puerto

Sec. 404.4 Authority to grant licenses.

Federally owned inventions shall be made available for licensing as deemed appropriate in the public interest. Federal agencies having custody of federally owned inventions may grant nonexclusive, partially exclusive, or exclusive licenses thereto under this part.

Sec. 404.5 Restrictions and conditions on all licenses granted under this part.

- (a) (1) A license may be granted only if the applicant has supplied the Federal agency with a satisfactory plan for development or marketing of the invention, or both, and with information about the applicant's capability to fulfill
- (2) A license granting rights to use or sell under a federally owned invention in the United States shall normally be granted only to a licensee who agrees that any products embodying the invention or produced through the use of the invention will be manufactured substantially in the United States.
- (b) Licenses shall contain such terms and conditions as the Federal agency determines are appropriate for the protection of the interests of the Federal Government and the public and are not in conflict with law or this part. The following terms and conditions apply to any license:
- (1) The duration of the license shall be for a period specified in the license agreement unless sooner terminated in accordance with this part.

- (2) The license may be granted for all or less than all fields of use of the invention or in specified geographical areas, or both.
- (3) The license may extend to subsidiaries of the licensee or other parties if provided for in the license but shall be nonassignable without approval of the Federal agency, except to the successor of that part of the licensee's business to which the invention pertains.
- (4) The licensee may provide the license the right to grant sublicenses under the license, subject to the approval of the Federal agency. Each sublicense shall make reference to the license, including the rights retained by the Government, and a copy of such sublicense shall be furnished to the Federal agency.
- (5) The license shall require the licensee to carry out the plan for development or marketing of the invention, or both, to bring the invention to practical application within a period specified in the license, and to continue to make the benefits of the invention reasonably accessible to the public.
- (6) The license shall require the licensee to report periodically on the utilization or efforts at obtaining utilization that are being made by the licensee, with particular reference to the plan submitted.
- (7) Licenses may be royalty–free or for royalties or other consid–eration.
- (8) Where an agreement is obtained pursuant to Sec.404.5(a) (2) that any products embodying the invention or produced through use of the invention will be manufactured substantially in the United States, the license shall recite such agreement.
- (9) The license shall provide for the right of the Federal agency to terminate the license, in whole or in part, if:
- (i) The Federal agency determines that the licensee is not executing the plan submitted with its request for a license and the licensee cannot otherwise demonstrate to the satisfaction of the Federal agency that it has taken or can be expected to take within a reasonable time effective steps to achieve practical application of the invention;
- (ii) The Federal agency determines that such action is necessary to meet requirements for public use specified by Federal regulations issued after the date of the license and such requirements are not reasonably satisfied by the licensee;
- (iii) The licensee has willfully made a false statement of or willfully omitted a material fact in the license application or in any report required by the license agreement; or
- (iv) The licensee commits a substantial breach of a covenant or agreement contained in the license.
- (10) The license may be modified or terminated, consistent with this part, upon mutual agreement of the Federal agency and the licensee.
- (11) Nothing relating to the grant of a license, nor the grant itself, shall be construed to confer upon any person any immunity from or defenses under the antitrust laws or from a charge of patent misuse, and the acquisition and use of rights pursuant to this part shall not be immunized from the operation of state or Federal law by reason of the source of the grant.

Sec. 404.6 Nonexclusive licenses.

- (a) Nonexclusive licenses may be granted under federally owned inventions without publication of availability or notice of a prospective license.
- (b) In addition to the provisions of Sec. 404.5, the nonexclusive license may also provide that, after termination of a period specified in the license agreement, the Federal agency may restrict the license to the fields of use or geographic areas, or both, in which the licensee has brought the invention to practical application and continues to make the benefits of the invention reasonably accessible to the public. However, such restriction shall be made only in order to grant an exclusive or partially exclusive license in accordance with this subpart.

Sec. 404.7 Exclusive and partially exclusive licenses.

- (a) (1) Exclusive or partially exclusive domestic licenses may be granted on federally owned inventions three months after notice of the invention's availability has been announced in the Federal Register, or without such notice where the Federal agency determines that expeditious granting of such a license will best serve the interest of the Federal Government and the public; and in either situation, only if:
- (i) Notice of a prospective license, identifying the invention and the prospective licensee, has been published in the Federal Register, providing opportunity for filing written objections within a 60-day period;
- (ii) After expiration of the period in Sec. 404.7(a)(1)(i) and consideration of any written objections received during the period, the Federal agency has determined that;
- (A) The interests of the Federal Government and the public will best be served by the proposed license, in view of the applicant's intentions, plans, and ability to bring the invention to practical application or otherwise promote the invention's utilization by the public;
- (B) The desired practical application has not been achieved, or is not likely expeditiously to be achieved, under any nonexclusive license which has been granted, or which may be granted, on the invention;
- (C) Exclusive or partially exclusive licensing is a reasonable and necessary incentive to call forth the investment of risk capital and expenditures to bring the invention to practical application or otherwise promote the invention's utilization by the public; and
- (D) The proposed terms and scope of exclusivity are not greater than reasonably necessary to provide the incentive for bringing the invention to practical application or otherwise promote the invention's utilization by the public;
- (iii) The Federal agency has not determined that the grant of such license will tend substantially to lessen competition or result in undue concentration in any section of the country in any line of commerce to which the technology to be licensed relates, or to create or maintain other situations inconsistent with the antitrust laws; and
- (iv) The Federal agency has given first preference to any small business firms submitting plans that are determined by the agency to be within the capabilities of the firms and as equally likely, if executed, to bring the invention to practical application as any plans submitted by applicants that are not small business firms.
- (2) In addition to the provisions of Sec. 404.5, the following terms and conditions apply to domestic exclusive and partially exclusive licenses;
- (i) The license shall be subject to the irrevocable, royalty—free right of the Government of the United States to practice and have practiced the invention on behalf of the United States and on behalf of any foreign government or international organization pursuant to any existing or future treaty or agreement with the United States.
- (ii) The license shall reserve to the Federal agency the right to require the licensee to grant sublicenses to responsible applicants, on reasonable terms, when necessary to fulfill health or safety needs.
- (iii) The license shall be subject to any licenses in force at the time of the grant of the exclusive or partially exclusive license.
- (iv) The license may grant the licensee the right of enforcement of the licensed patent pursuant to the provisions of Chapter 29 of Title 35, United States Code, or other statutes, as determined appropriate in the public interest.
- (b) (1) Exclusive or partially exclusive licenses may be granted on a federally owned invention covered by a foreign patent, patent application, or other form of protection, provided that;
- (i) Notice of a prospective license, identifying the invention and prospective licensee, has been published in the Federal Register, providing opportunity for filing written objections within a 60-day period and following consideration of such objections;

- (ii) The agency has considered whether the interests of the Federal Government or United States industry in foreign commerce will be enhanced; and
- (iii) The Federal agency has not determined that the grant of such license will tend substantially to lessen competition or result in undue concentration in any section of the United States in any line of commerce to which the technology to be licensed relates, or to create or maintain other situations inconsistent with antitrust laws.
- (2) In addition to the provisions of Sec. 404.5 the following terms and conditions apply to foreign exclusive and partially exclusive licenses:
- (i) The license shall be subject to the irrevocable, royalty—free right of the Government of the United States to practice and have practiced the invention on behalf of the United States and on behalf of any foreign government or international organization pursuant to any existing or future treaty or agreement with the United States.
- (ii) The license shall be subject to any licenses in force at the time of the grant of the exclusive or partially exclusive license.
- (iii) The license may grant the licensee the right to take any suitable and necessary actions to protect the licensed property, on behalf of the Federal Government.
- (c) Federal agencies shall maintain a record of determinations to grant exclusive or partially exclusive licenses.

Sec. 404.8 Application for a license.

An application for a license should be addressed to the Federal agency having custody of the invention and shall normally include:

- (a) Identification of the invention for which the license is desired including the patent application serial number or patent number, title, and date, if known;
- (b) Identification of the type of license for which the application is submitted;
- (c) Name and address of the person, company, or organization applying for the license and the citizenship or place of incorporation of the applicant;
- (d) Name, address, and telephone number of the representative of the applicant to whom correspondence should be sent;
- (e) Nature and type of applicant's business, identifying products or services which the applicant has successfully commercialized, and approximate number of applicant's employees;
- (f) Source of information concerning the availability of a license on the invention:
- (g) A statement indicating whether the applicant is a small business firm as defined in Sec.404.3(c)
- (h) A detailed description of applicant's plan for development or marketing of the invention, or both, which should include:
- (1) A statement of the time, nature and amount of anticipated investment of capital and other resources which applicant believes will be required to bring the invention to practical application;
- (2) A statement as to applicant's capability and intention to fulfill the plan, including information regarding manufacturing, marketing, financial, and technical resources;
- (3) A statement of the fields of use for which applicant intends to practice the invention; and
- (4) A statement of the geographic areas in which applicant intends to manufacture any products embodying the invention and geographic areas where applicant intends to use or sell the invention, or both;
- (i) Identification of licenses previously granted to applicant under federally owned inventions;
- (j) A statement containing applicant's best knowledge of the extent to which the invention is being practiced by private industry or Government, or both, or is otherwise available commercially; and

(k) Any other information which applicant believes will support a determination to grant the license to applicant.

Sec. 404.9 Notice to Attorney General.

A copy of the notice provided for in Sec. 404.7(a)(1)(i) and (b)(1)(i) will be sent to the Attorney General.

Sec. 404.10 Modification and termination of licenses.

Before modifying or terminating a license, other than by mutual agreement, the Federal agency shall furnish the licensee and any sublicensee of record a written notice of intention to modify or terminate the license, and the licensee and any sublicensee shall be allowed 30 days after such notice to remedy any breach of the license or show cause why the license shall not be modified or terminated.

Sec. 404.11 Appeals.

In accordance with procedures prescribed by the Federal agency, the following parties may appeal to the agency head or designee any decision or determination concerning the grant, denial, interpretation, modification, or termination of a license:

- (a) A person whose application for a license has been denied.
- (b) A licensee whose license has been modified or terminated, in whole or in part; or
- (c) A person who timely filed a written objection in response to the notice required by Sec. 404.7(a)(1)(i) or Sec. 404.7(b)(1)(i) and who can demonstrate to the satisfaction of the Federal agency that such person may be damaged by the agency action.

Sec. 404.12 Protection and administration of inventions.

A Federal agency may take any suitable and necessary steps to protect and administer rights to federally owner inventions, either directly or through contract.

Sec. 404.13 Transfer of custody.

A Federal agency having custody of a federally owned invention may transfer custody and administration, in whole or in part, to another Federal agency, of the right, title, or interest in such invention.

Sec. 404.14 Confidentiality of information.

Title 35, United States Code, section 209, provides that any plan submitted pursuant to Sec. 404.8 (h) and any report required by Sec. 404.5(b)(6) may be treated by the Federal agency as commercial and financial information obtained from a person and privileged and confidential and not subject to disclosure under section 552 of Title 5 of the United States Code.

Report Documentation Page

NASA/SP—2002-7039/SUPPL60 4. Title and Subtitle NASA Patent Abstracts A Continuing Bibliography (Supplement 60) 5. Report Date January 2002 6. Performing Organization Code 7. Author(s) 8. Performing Organization Report No. 10. Work Unit No. 9. Performing Organization Name and Address NASA Scientific and Technical Information Program Office 11. Contract or Grant No. 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 15. Supplementary Notes
NASA Patent Abstracts A Continuing Bibliography (Supplement 60) 7. Author(s) 8. Performing Organization Report No. 10. Work Unit No. 9. Performing Organization Name and Address NASA Scientific and Technical Information Program Office 11. Contract or Grant No. 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 15. Supplementary Notes
A Continuing Bibliography (Supplement 60) 6. Performing Organization Code 7. Author(s) 8. Performing Organization Report No. 10. Work Unit No. 9. Performing Organization Name and Address NASA Scientific and Technical Information Program Office 11. Contract or Grant No. 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 15. Supplementary Notes
A Continuing Bibliography (Supplement 60) 6. Performing Organization Code 7. Author(s) 8. Performing Organization Report No. 10. Work Unit No. 9. Performing Organization Name and Address NASA Scientific and Technical Information Program Office 11. Contract or Grant No. 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 15. Supplementary Notes
7. Author(s) 8. Performing Organization Report No. 10. Work Unit No. 9. Performing Organization Name and Address NASA Scientific and Technical Information Program Office 11. Contract or Grant No. 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 15. Supplementary Notes
9. Performing Organization Name and Address NASA Scientific and Technical Information Program Office 11. Contract or Grant No. 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 15. Supplementary Notes
9. Performing Organization Name and Address NASA Scientific and Technical Information Program Office 11. Contract or Grant No. 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 15. Supplementary Notes
9. Performing Organization Name and Address NASA Scientific and Technical Information Program Office 11. Contract or Grant No. 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 13. Type of Report and Period Covered Special Publication 14. Sponsoring Agency Code 15. Supplementary Notes
9. Performing Organization Name and Address NASA Scientific and Technical Information Program Office 11. Contract or Grant No. 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 13. Type of Report and Period Covered Special Publication 14. Sponsoring Agency Code 15. Supplementary Notes
NASA Scientific and Technical Information Program Office 11. Contract or Grant No. 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 13. Type of Report and Period Covered Special Publication 14. Sponsoring Agency Code 15. Supplementary Notes
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 13. Type of Report and Period Covered Special Publication 14. Sponsoring Agency Code 15. Supplementary Notes
National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 15. Supplementary Notes Special Publication 14. Sponsoring Agency Code
National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681 15. Supplementary Notes Special Publication 14. Sponsoring Agency Code
Langley Research Center Hampton, VA 23681 15. Supplementary Notes
Hampton, VA 23681 15. Supplementary Notes
15. Supplementary Notes
16. Abstract
16. Abstract
16. Abstract
16. ADSTRACT
TELL ALL ALL ALL ALL ALL ALL ALL ALL ALL
This report lists reports, articles and other documents recently announced in the NASA STI
Database.
17. Key Words (Suggested by Author(s)) 18. Distribution Statement
Bibliographies Unclassified - Unlimited
Bibliographies Unclassified - Unlimited Patent Policy Subject Category - 82
Bibliographies Unclassified - Unlimited
Bibliographies Unclassified - Unlimited Patent Policy Subject Category - 82

Federal Regional Depository Libraries

ALABAMA AUBURN UNIV. AT MONTGOMERY LIBRARY

Documents Dept. 7300 University Dr. Montgomery, AL 36117–3596 (205) 244–3650 Fax: (205) 244–0678

UNIV. OF ALABAMA

Amelia Gayle Gorgas Library Govt. Documents P.O. Box 870266 Tuscaloosa, AL 35487-0266 (205) 348-6046 Fax: (205) 348-0760

ARIZONA DEPT. OF LIBRARY, ARCHIVES, AND PUBLIC RECORDS

Research Division Third Floor, State Capitol 1700 West Washington Phoenix, AZ 85007 (602) 542–3701 Fax: (602) 542–4400

ARKANSAS ARKANSAS STATE LIBRARY

State Library Service Section Documents Service Section One Capitol Mall Little Rock, AR 72201-1014 (501) 682–2053 Fax: (501) 682–1529

CALIFORNIA CALIFORNIA STATE LIBRARY Govt. Publications Section

P.O. Box 942837 - 914 Capitol Mall Sacramento, CA 94337-0091 (916) 654-0069 Fax: (916) 654-0241

COLORADO

UNIV. OF COLORADO - BOULDER Libraries - Govt. Publications

Campus Box 184 Boulder, CO 80309-0184 (303) 492-8834 Fax: (303) 492-1881

DENVER PUBLIC LIBRARY

Govt. Publications Dept. BSG 1357 Broadway Denver, CO 80203-2165 (303) 640-8846 Fax: (303) 640-8817

CONNECTICUT CONNECTICUT STATE LIBRARY 231 Capitol Avenue

Hartford, CT 06106 (203) 566-4971 Fax: (203) 566-3322

FLORIDA UNIV. OF FLORIDA LIBRARIES

Documents Dept. 240 Library West Gainesville, FL 32611-2048 (904) 392-0366 Fax: (904) 392-7251

GEORGIA UNIV. OF GEORGIA LIBRARIES

Govt. Documents Dept. Jackson Street Athens, GA 30602-1645 (706) 542-8949 Fax: (706) 542-4144

HAWAII UNIV. OF HAWAII Hamilton Library Govt. Documents Collection 2550 The Mall Honolulu, HI 96822 (808) 948–8230 Fax: (808) 956–5968

IDAHO UNIV. OF IDAHO LIBRARY

Documents Section Rayburn Street Moscow, ID 83844-2353 (208) 885-6344 Fax: (208) 885-6817

ILLINOIS ILLINOIS STATE LIBRARY

Federal Documents Dept. 300 South Second Street Springfield, IL 62701-1796 (217) 782-7596 Fax: (217) 782-6437

INDIANA INDIANA STATE LIBRARY

Serials/Documents Section 140 North Senate Avenue Indianapolis, IN 46204-2296 (317) 232-3679 Fax: (317) 232-3728

IOWA UNIV. OF IOWA LIBRARIES Govt. Publications Washington & Madison Streets lowa City, IA 52242-1166 (319) 335-5926 Fax: (319) 335-5900

KANSAS

UNIV. OF KANSAS
Govt. Documents & Maps Library 6001 Malott Hall Lawrence, KS 66045–2800 (913) 864–4660 Fax: (913) 864–3855

UNIV. OF KENTUCKY

King Library South Govt. Publications/Maps Dept. Patterson Drive Lexington, KY 40506-0039 (606) 257-3139 Fax: (606) 257-3139

LOUISIANA LOUISIANA STATE UNIV.

Middleton Library Govt. Documents Dept. Baton Rouge, LA 70803-3312 (504) 388-2570 Fax: (504) 388-6992

LOUISIANA TECHNICAL UNIV. Prescott Memorial Library

Govt. Documents Dept. Ruston, LA 71272-0046 (318) 257-4962 Fax: (318) 257-2447

MAINE UNIV. OF MAINE

Raymond H. Fogler Library Govt. Documents Dept.

Orono, ME 04469-5729 (207) 581-1673 Fax: (207) 581-1653

MARYLAND UNIV. OF MARYLAND – COLLEGE PARK McKeldin Library

Govt. Documents/Maps Unit College Park, MD 20742 (301) 405–9165 Fax: (301) 314–9416

MASSACHUSETTS BOSTON PUBLIC LIBRARY Govt. Documents

666 Boylston Street Boston, MA 02117–0286 (617) 536–5400, ext. 226 Fax: (617) 536–7758

MICHIGAN

DETROIT PUBLIC LIBRARY

5201 Woodward Avenue Detroit, MI 48202-4093 (313) 833-1025 Fax: (313) 833-0156

LIBRARY OF MICHIGAN Govt. Documents Unit

P.O. Box 30007 717 West Allegan Street Lansing, MI 48909 (517) 373–1300 Fax: (517) 373–3381

MINNESOTA UNIV. OF MINNESOTA Govt. Publications

409 Wilson Library 309 19th Avenue South Minneapolis, MN 55455 (612) 624-5073 Fax: (612) 626-9353

MISSISSIPPI UNIV. OF MISSISSIPPI

J.D. Williams Library 106 Old Gym Bldg. University, MS 38677 (601) 232-5857 Fax: (601) 232-7465

MISSOURI UNIV. OF MISSOURI – COLUMBIA 106B Ellis Library Govt. Documents Sect.

Columbia, MO 65201-5149 (314) 882-6733 Fax: (314) 882-8044

MONTANA UNIV. OF MONTANA

Mansfield Library Documents Division Missoula, MT 59812-1195 (406) 243-6700 Fax: (406) 243-2060

NEBRASKA

UNIV. OF NEBRASKA – LINCOLN

D.L. Love Memorial Library Lincoln, NE 68588-0410 (402) 472-2562 Fax: (402) 472-5131

NEVADA THE UNIV. OF NEVADA LIBRARIES

Business and Govt. Information

Reno, NV 89557-0044 (702) 784-6579 Fax: (702) 784-1751

NEW JERSEY NEWARK PUBLIC LIBRARY

Science Div. - Public Access P.O. Box 630 Five Washington Street Newark, NJ 07101-7812 (201) 733-7782 Fax: (201) 733-5648

NEW MEXICO

UNIV. OF NEW MEXICO General Library Govt. Information Dept. Albuquerque, NM 87131-1466 (505) 277-5441 Fax: (505) 277-6019

NEW MEXICO STATE LIBRARY

325 Don Gaspar Avenue Santa Fe, NM 87503 (505) 827-3824 Fax: (505) 827-3888

NEW YORK NEW YORK STATE LIBRARY

Cultural Education Cente Documents/Gift & Exchange Section Empire State Plaza Albany, NY 12230-0001 (518) 474-5355 Fax: (518) 474-5786

NORTH CAROLINA UNIV. OF NORTH CAROLINA – CHAPEL HILL

Walter Royal Davis Library CB 3912, Reference Dept. Chapel Hill, NC 27514-8890 (919) 962-1151 Fax: (919) 962-4451

NORTH DAKOTA NORTH DAKOTA STATE UNIV. LIB.

Documents P.O. Box 5599 Fargo, ND 58105-5599 (701) 237-8886 Fax: (701) 237-7138

UNIV. OF NORTH DAKOTA Chester Fritz Library

University Station P.O. Box 9000 - Centennial and University Avenue Grand Forks, ND 58202-9000 (701) 777-4632 Fax: (701) 777-3319

OHIO STATE LIBRARY OF OHIO

Documents Dept. 65 South Front Street Columbus, OH 43215-4163 (614) 644-7051 Fax: (614) 752-9178

OKLAHOMA OKLAHOMA DEPT. OF LIBRARIES U.S. Govt. Information Division

200 Northeast 18th Street Oklahoma City, OK 73105-3298 (405) 521-2502, ext. 253 Fax: (405) 525-7804

OKLAHOMA STATE UNIV.

Edmon Low Library Stillwater, OK 74078-0375 (405) 744-6546 Fax: (405) 744-5183

OREGON PORTLAND STATE UNIV. Branford P. Millar Library 934 Southwest Harrison Portland, OR 97207-1151 (503) 725-4123 Fax: (503) 725-4524

PENNSYLVANIA STATE LIBRARY OF PENN. Govt. Publications Section 116 Walnut & Commonwealth Ave. Harrisburg, PA 17105–1601 (717) 787–3752 Fax: (717) 783–2070

SOUTH CAROLINA CLEMSON UNIV. Robert Muldrow Cooper Library Public Documents Unit P.O. Box 343001 Clemson, SC 29634-3001

UNIV. OF SOUTH CAROLINA

Thomas Cooper Library Green and Sumter Streets Columbia, SC 29208 (803) 777-4841 Fax: (803) 777-9503

(803) 656-5174 Fax: (803) 656-3025

TENNESSEE UNIV. OF MEMPHIS LIBRARIES

Govt. Publications Dept. Memphis, TN 38152-0001 (901) 678-2206 Fax: (901) 678-2511

TEXAS STATE LIBRARY United States Documents P.O. Box 12927 – 1201 Brazos Austin, TX 78701–0001 (512) 463-5455 Fax: (512) 463-5436

TEXAS TECH. UNIV. LIBRARIES

Documents Dept Lubbock, TX 79409–0002 (806) 742–2282 Fax: (806) 742–1920

UTAH UTAH STATE UNIV.

Merrill Library Documents Dept. Logan, UT 84322-3000 (801) 797-2678 Fax: (801) 797-2677

VIRGINIA UNIV. OF VIRGINIA Alderman Library Govt. Documents University Ave. & McCormick Rd. Charlottesville, VA 22903-2498 (804) 824-3133 Fax: (804) 924-4337

WASHINGTON WASHINGTON STATE LIBRARY

Govt. Publications P.O. Box 42478 16th and Water Streets Olympia, WA 98504-2478 (206) 753-4027 Fax: (206) 586-7575

WEST VIRGINIA WEST VIRGINIA UNIV. LIBRARY Govt. Documents Section

P.O. Box 6069 - 1549 University Ave. Morgantown, WV 26506-6069 (304) 293-3051 Fax: (304) 293-6638

WISCONSIN ST. HIST. SOC. OF WISCONSIN LIBRARY

Govt. Publication Section 816 State Street Madison, WI 53706 (608) 264-6525 Fax: (608) 264-6520

MILWAUKEE PUBLIC LIBRARY

Documents Division 814 West Wisconsin Avenue Milwaukee, WI 53233 (414) 286-3073 Fax: (414) 286-8074